

Description


Fastener Length: 5/16", Thread: 8-32, Head Width: 5/64", MS18065 series screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|--|
| SKU / Model: | MS1806518 |
| Minimum Qty (MOQ): | 10 |
| NSN: | 5305-01-199-3770 |
| Schedule B: | 7318.15.6080 |
| ECCN: | EAR99 |
| National Motor Freight: | 096630, Screws Noi Brass / Bronze / Copper |

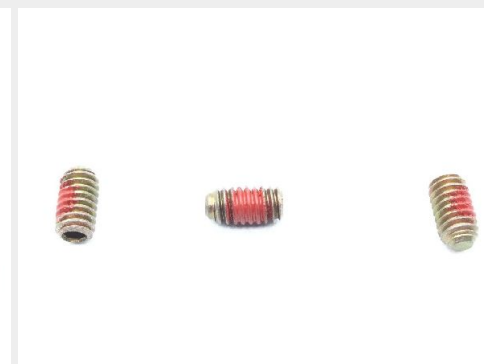

* See page 2 for technical characteristics

P/N MS18065-18 Specifications

| | |
|---|--|
| Thread Class: | 3a |
| Thread Direction: | Right-hand |
| Fastener Length: | 0.302 Inches Minimum And 0.322 Inches Maximum |
| Head Style: | Headless (setscrew) |
| Locking Feature: | Pellet Threads Or Strip Threads |
| Point Style: | Flat |
| Internal Drive Style: | Hexagon |
| Nominal Thread Diameter: | 0.164 Inches |
| Width Across Flats: | 0.078 Inches Minimum And 0.079 Inches Maximum |
| Thread Quantity Per Inch: | 32 |
| Hardness Rating: | 45.0 Rockwell C Minimum Overall And 53.0 Rockwell C Maximum Overall |
| Material: | Steel Comp 4032 Overall Or Steel Comp 4037 Overall Or Steel Comp 4137 Overall Or Steel Comp 4140 Overall Or Steel Comp 8630 Overall Or Steel Comp 8740 Overall |
| Material Document And Classification: | N0.66 Fed Std All Material Responses Overall |
| Surface Treatment: | Cadmium Overall |
| Surface Treatment Document And Classification: | Qq-p-416,type 2,class 3 Fed Spec Single Treatment Response Overall |
| Thread Series Designator: | Unc |

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS18065-18> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.