

**Description**


length: 23/32, diameter: 1/8", straight, drill shank, cadmium plated steel alloy

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

|                         |                             |
|-------------------------|-----------------------------|
| SKU / Model:            | MS203921C23                 |
| Minimum Qty (MOQ):      | 25                          |
| NSN:                    | 5315-00-811-1267            |
| ECCN:                   | EAR99                       |
| National Motor Freight: | 095190, Hardware, Noi Sub 9 |

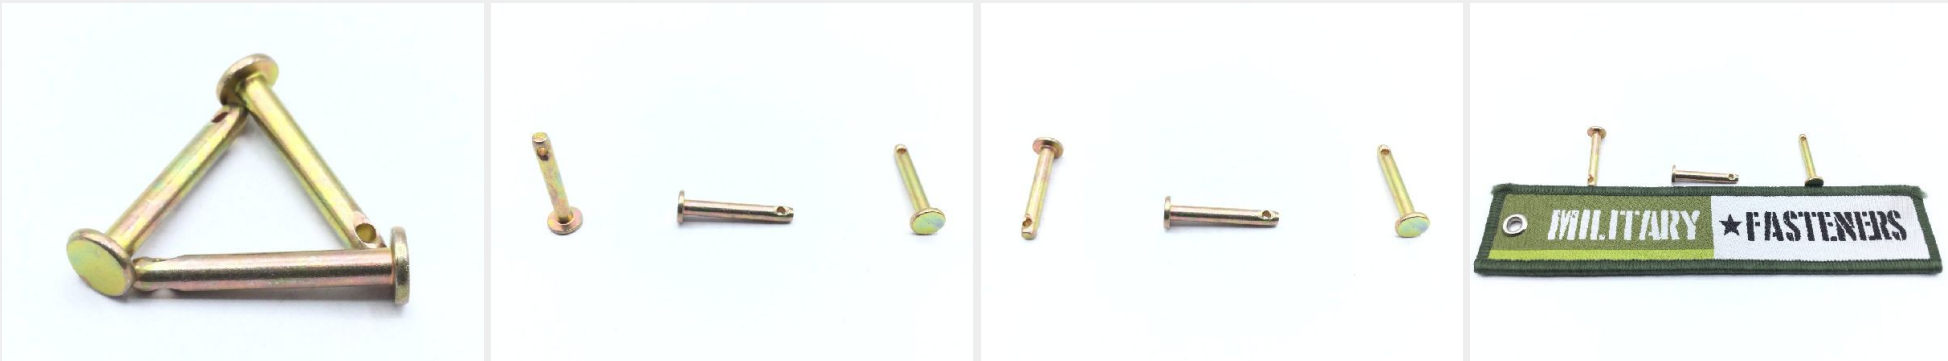

## P/N MS20392-1C23 Specifications

|                                                        |                                                                                                                                                           |
|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Head Style:</b>                                     | Pan No. 2 (r1 Not Required In Item Description)                                                                                                           |
| <b>Chamfer Length:</b>                                 | 0.062 Inches Maximum                                                                                                                                      |
| <b>Diameter:</b>                                       | 0.122 Inches Minimum And 0.124 Inches Maximum                                                                                                             |
| <b>Under Head Length:</b>                              | 0.835 Inches Minimum And 0.855 Inches Maximum                                                                                                             |
| <b>Hole Arrangement Style:</b>                         | One End Drilled                                                                                                                                           |
| <b>First Hole Diameter:</b>                            | 0.060 Inches Minimum And 0.080 Inches Maximum                                                                                                             |
| <b>Distance From Centerline Of Hole To End Of Pin:</b> | 0.091 Inches Nominal                                                                                                                                      |
| <b>Hardness Rating:</b>                                | 26.5 Rockwell C Minimum Overall And 32.0 Rockwell C Maximum Overall                                                                                       |
| <b>Pin Chamfer Angle:</b>                              | 14.5 Degrees Minimum And 15.5 Degrees Maximum                                                                                                             |
| <b>Pin Head Diameter:</b>                              | 0.234 Inches Minimum And 0.266 Inches Maximum                                                                                                             |
| <b>Special Features:</b>                               | The Shank End Of Pin May Have Either A Chamfer Or Radius At The Option Of The Vendor                                                                      |
| <b>Height:</b>                                         | 0.030 Inches Minimum And 0.062 Inches Maximum                                                                                                             |
| <b>Material:</b>                                       | Steel Comp 4037 Overall Or Steel Comp 4130 Overall Or Steel Comp 8630 Overall                                                                             |
| <b>Material Document And Classification:</b>           | Ams 6300 Assn Std 1st Material Response Overall Or Mil-s-6758 Mil Spec 2nd Material Response Overall Or Mil-s-6050 Mil Spec 3rd Material Response Overall |
| <b>Surface Treatment:</b>                              | Cadmium Overall And Chromate Overall                                                                                                                      |
| <b>Surface Treatment Document And Classification:</b>  | Qq-p-416,ty 2 Cl 2 Fed Spec Single Treatment Response Overall                                                                                             |
| <b>Style Designator:</b>                               | Straight                                                                                                                                                  |

## How to Order

Order this straight headed pin from our inventory online by visiting <https://military-fasteners.com/pins/straight+headed+pins/MS20392-1C23> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.