

Description


Fastener Length: 3/32, roughly 1510 pieces per pound

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS20426D63
Minimum Qty (MOQ):	100
NSN:	5320-01-613-1408
Schedule B:	7616.10.3000
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

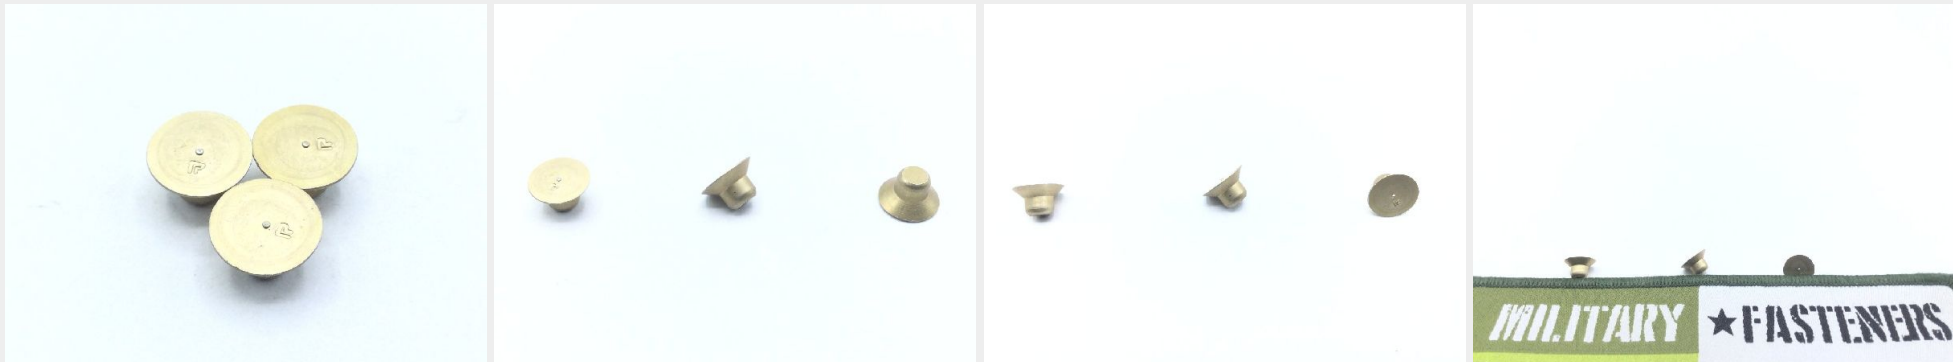

* See page 2 for technical characteristics

P/N MS20426D6-3 Specifications

Fastener Length:	0.084 Inches Minimum And 0.104 Inches Maximum
Head Style:	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
Shank Diameter:	0.186 Inches Minimum And 0.190 Inches Maximum
Shank Style:	Straight W/radius Chamfered Tip
Head Major Diameter:	0.349 Inches Minimum And 0.357 Inches Maximum
End Item Identification:	5310-01-024-6299
Features Provided:	Standard
Shear Strength:	33000 Single Pounds Per Square Inch
Countersink Angle:	100.0 Degrees Nominal
Part Name Assigned By Controlling Agency:	Rivet,solid,c'sunk 100 Deg,precision Head,alum Alloy
Special Features:	Matl 2017-t4 Is Inactive For New Design
Material:	Aluminum Alloy 2017 Overall
Material Document And Classification:	Qq-a-430,2017-t4 Fed Spec Single Material Response Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625,ty li,cl 1 Mil Spec Single Treatment Response Overall

How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/MS20426D6-3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.