

**Description**


Fastener Length: 3/32, roughly 1510 pieces per pound

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS20426D63
Minimum Qty (MOQ):	100
NSN:	5320-01-613-1408
Schedule B:	7616.10.3000
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

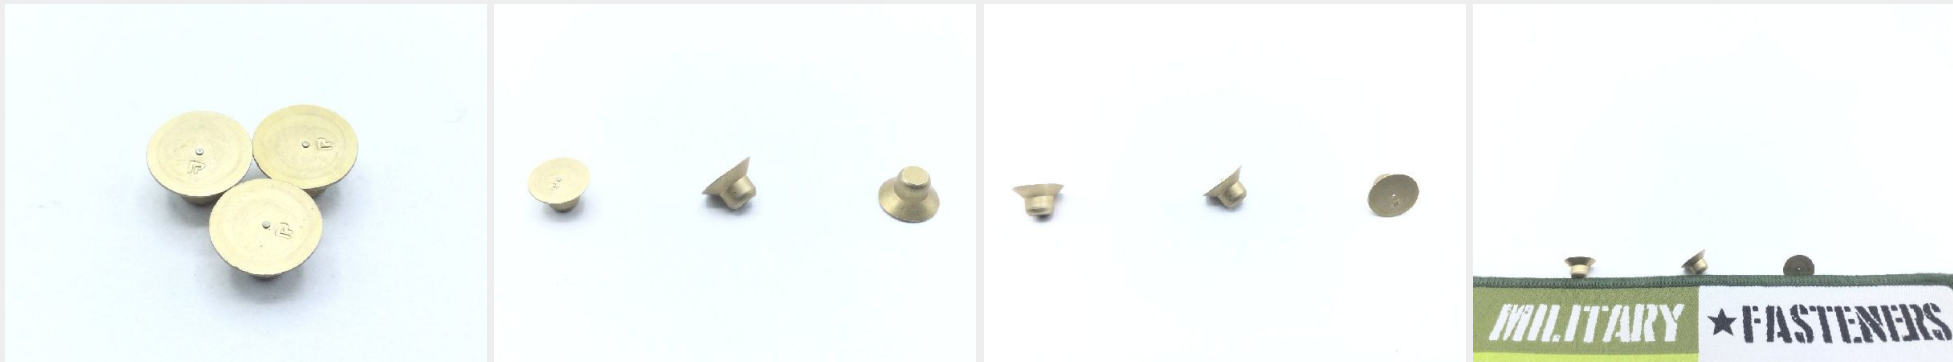

\* See page 2 for technical characteristics

## P/N MS20426D6-3 Specifications

<b>Fastener Length:</b>	0.084 Inches Minimum And 0.104 Inches Maximum
<b>Head Style:</b>	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
<b>Shank Diameter:</b>	0.186 Inches Minimum And 0.190 Inches Maximum
<b>Shank Style:</b>	Straight W/radius Chamfered Tip
<b>Head Major Diameter:</b>	0.349 Inches Minimum And 0.357 Inches Maximum
<b>End Item Identification:</b>	5310-01-024-6299
<b>Features Provided:</b>	Standard
<b>Shear Strength:</b>	33000 Single Pounds Per Square Inch
<b>Countersink Angle:</b>	100.0 Degrees Nominal
<b>Part Name Assigned By Controlling Agency:</b>	Rivet,solid,c'sunk 100 Deg,precision Head,alum Alloy
<b>Special Features:</b>	Matl 2017-t4 Is Inactive For New Design
<b>Material:</b>	Aluminum Alloy 2017 Overall
<b>Material Document And Classification:</b>	Qq-a-430,2017-t4 Fed Spec Single Material Response Overall
<b>Surface Treatment:</b>	Anodize Overall
<b>Surface Treatment Document And Classification:</b>	Mil-a-8625,ty li,cl 1 Mil Spec Single Treatment Response Overall

## How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/MS20426D6-3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.