

## P/N MS20427M5C7

### **Description**

Fastener Length: 7/16

\* Manufacturer certifications are shipped with your order <u>FREE</u> of charge

## Order this part online

#### **Additional Information**

SKU / Model: MS20427M5C7


Minimum Qty (MOQ): 100

NSN: 5320-00-043-1948

Schedule B: 7508.90.5000

ECCN: EAR99

National Motor Freight: 139820, Nickel Bolts / Nails / Nuts / Rivets Etc

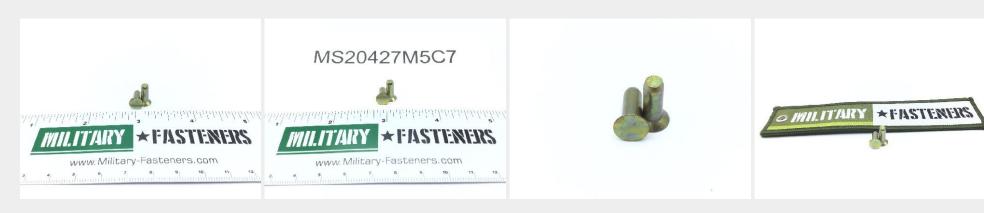

<sup>\*</sup> See page 2 for technical characteristics

# P/N MS20427M5C7 Specifications

Fastener Length:	0.438 Inches Nominal
Head Style:	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
Head Height:	0.061 Inches Maximum
Shank Diameter:	0.156 Inches Nominal
Shank Style:	Straight
Head Major Diameter:	0.257 Inches Minimum And 0.298 Inches Maximum
Countersink Angle:	100.0 Degrees Nominal
Heat Treatment:	Annealed Overall
Material:	Nickel Alloy 400 Overall Or Nickel Alloy R-405 Overall
Material Document And Classification:	Qq-n-281 Fed Spec All Material Responses Overall
Surface Treatment:	Cadmium Overall Or Chromate Overall

## **How to Order**

Order this rivet from our inventory online by visiting <a href="https://military-fasteners.com/rivets/solid+rivets/MS20427M5C7">https://military-fasteners.com/rivets/solid+rivets/MS20427M5C7</a> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out here to complete your order.