

Description


MS20470T5-5 Solid Rivet, roughly 480 pieces per pound

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS20470T55
Minimum Qty (MOQ):	25
NSN:	5320-01-238-0678
ECCN:	EAR99
National Motor Freight:	136500, Metal Noi / Metal Alloys Noi

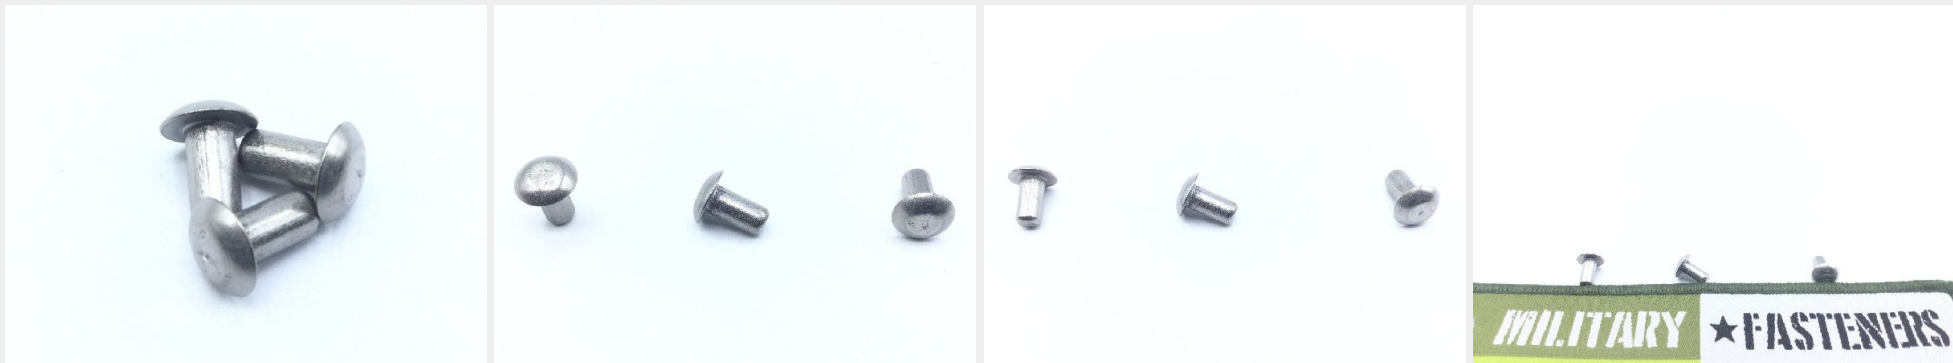

* See page 2 for technical characteristics

P/N MS20470T5-5 Specifications

Fastener Length:	0.302 Inches Minimum And 0.322 Inches Maximum
Head Style:	Universal
Head Height:	0.067 Inches Minimum And 0.077 Inches Maximum
Shank Diameter:	0.155 Inches Minimum And 0.160 Inches Maximum
Shank Style:	Straight W/radius Chamfered Tip
Head Major Diameter:	0.296 Inches Minimum And 0.328 Inches Maximum
Shear Strength:	50000 Single Pounds Per Square Inch
Heat Treatment:	Annealed Overall
Material:	Titanium Alloy Uns R58450 Overall
Material Document And Classification:	Ams 4982 Assn Std Single Material Response Overall

How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/MS20470T5-5> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.