

P/N MS20605AD3C6

Description

MS20605 series rivet

* Manufacturer certifications are shipped with your order <u>FREE</u> of charge

Order this part online

Additional Information

SKU / Model: MS20605AD3C6


Minimum Qty (MOQ): 100

NSN: 5320-01-456-1167

Schedule B: 7616.10.3000

ECCN: EAR99

National Motor Freight: 096320, Rivets I / S Nickel Plated Buffed

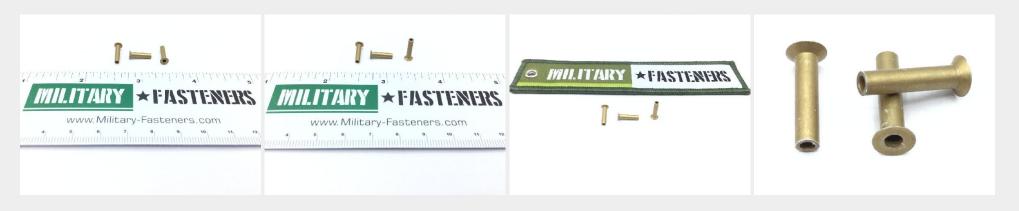

^{*} See page 2 for technical characteristics

P/N MS20605AD3C6 Specifications

Head Style:	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
Shank Diameter:	0.094 Inches Nominal
Shank Style:	Pull Through Hollow Shank
Head Major Diameter:	0.179 Inches Nominal
Expansion Device:	Mandrel-type C
Grip Length:	0.375 Inches Maximum
Countersink Angle:	100.0 Degrees Nominal
Material:	Aluminum Alloy 2117 Overall
Surface Treatment:	Anodize Overall And Chromate Overall

How to Order

Order this blind rivet from our inventory online by visiting https://military-fasteners.com/rivets/blind+rivets/MS20605AD3C6 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out here to complete your order.