



★ FASTENERS

Military-Fasteners.com

P/N MS20605R3W7

Description

MS20605 series rivet

* Manufacturer certifications are shipped with your order FREE of charge


Order this part online

Additional Information

Alternate Part Numbers

[CCR264CS3-7](#) [CCR264CS3-07](#)

SKU / Model:	MS20605R3W7
Minimum Qty (MOQ):	100
NSN:	5320-01-330-5328
Schedule B:	7318.23.0000
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

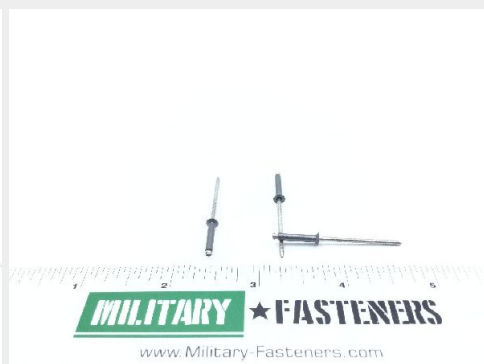

* See page 2 for technical characteristics

P/N MS20605R3W7 Specifications

Head Style:	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
Shank Diameter:	0.092 Inches Minimum And 0.097 Inches Maximum
Shank Style:	Self-plugging High Clinch Shank
Head Major Diameter:	0.183 Inches Maximum
Expansion Device:	Serrated Stem-type W
Lubrication:	Dry Film
Grip Length:	0.376 Inches Minimum And 0.438 Inches Maximum
Countersink Angle:	98.5 Degrees Minimum And 101.5 Degrees Maximum
Material:	Iron Alloy 660 Sleeve
Material:	Steel Comp 305 Stem
Material Document And Classification:	Ams 5731 Assn Std Single Material Response Sleeve
Material Document And Classification:	Astm A493 Assn Std Single Material Response Stem
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Overall

How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/MS20605R3W7> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.