


Description

MS20605R3W9 Blind Rivet

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information****Alternate Part Numbers**[CCR264CS3-09](#)

SKU / Model:	MS20605R3W9
Minimum Qty (MOQ):	10
NSN:	5320-01-335-9285
Schedule B:	7318.23.0000
ECCN:	EAR99
National Motor Freight:	096320, Rivets I / S Nickel Plated Buffed

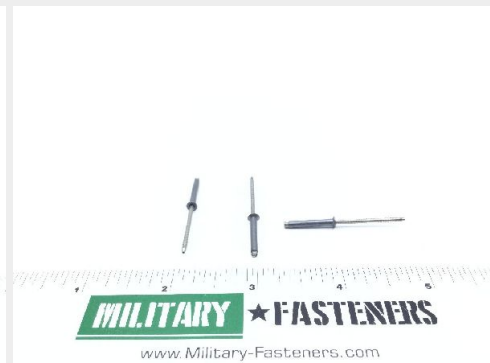

* See page 2 for technical characteristics

P/N MS20605R3W9 Specifications

Head Style:	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
Shank Diameter:	0.094 Inches Nominal
Shank Style:	Pin-rivet, Straight, Threaded
Head Major Diameter:	0.179 Inches Nominal
Expansion Device:	Serrated Stem-type W
Grip Length:	0.501 Inches Minimum And 0.562 Inches Maximum
Countersink Angle:	89.0 Degrees Minimum And 111.0 Degrees Maximum
Material:	Steel Corrosion Resisting Overall

How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/MS20605R3W9> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.