

**Description**



Fastener Length: 3/8", MS20605 series rivet

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS20605S3W5
Minimum Qty (MOQ):	100
NSN:	5320-01-234-1461
Schedule B:	7318.23.0000
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

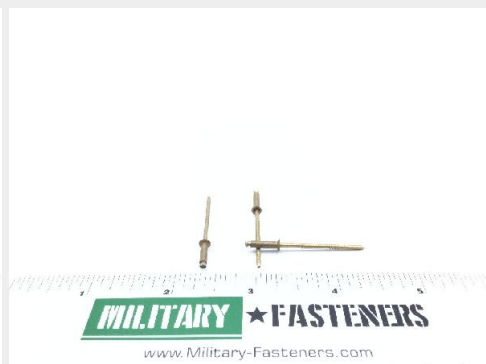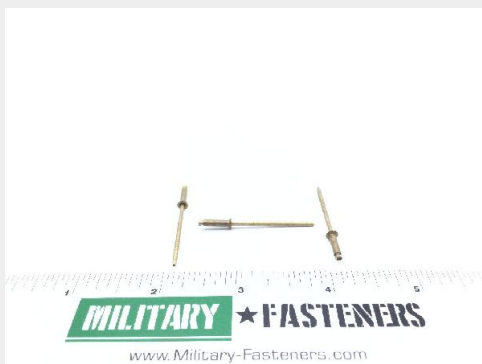

\* See page 2 for technical characteristics

## P/N MS20605S3W5 Specifications

<b>Fastener Length:</b>	0.390 Inches Maximum
<b>Head Style:</b>	Flush (flat) Countersunk (included Angle - Less Than 135 Deg W Or W/o Chamfer)
<b>Shank Diameter:</b>	0.092 Inches Minimum And 0.097 Inches Maximum
<b>Shank Style:</b>	Self-plugging High Clinch Shank
<b>Head Major Diameter:</b>	0.183 Inches Maximum
<b>Expansion Device:</b>	Serrated Stem-type W
<b>Grip Length:</b>	0.251 Inches Minimum And 0.312 Inches Maximum
<b>Countersink Angle:</b>	100.0 Degrees Nominal
<b>Material:</b>	Steel Comp 1008 Sleeve Or Steel Comp 1012 Sleeve Or Steel Comp 1018 Sleeve
<b>Material:</b>	Steel Comp 1008 Stem
<b>Material Document And Classification:</b>	Astm A545 Assn Std All Material Responses Sleeve
<b>Material Document And Classification:</b>	Astm A545 Assn Std Single Material Response Stem
<b>Surface Treatment:</b>	Cadmium Sleeve And Chromate Sleeve
<b>Surface Treatment:</b>	Cadmium Stem And Chromate Stem
<b>Surface Treatment Document And Classification:</b>	Qq-p-416,ty 2,cl 2 Fed Spec Single Treatment Response Stem
<b>Surface Treatment Document And Classification:</b>	Qq-p-416,ty 2,cl 2 Fed Spec Single Treatment Response Sleeve

## How to Order

Order this blind rivet from our inventory online by visiting <https://military-fasteners.com/rivets/blind+rivets/MS20605S3W5> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.