

Description


Fastener Length: 1/2", roughly 275 pieces per pound

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS206135P7
Minimum Qty (MOQ):	1 Pound
NSN:	5320-00-843-4062
Schedule B:	7318.23.0000
ECCN:	EAR99
National Motor Freight:	106510, Rivets I / S Plain / Galvanized Etc

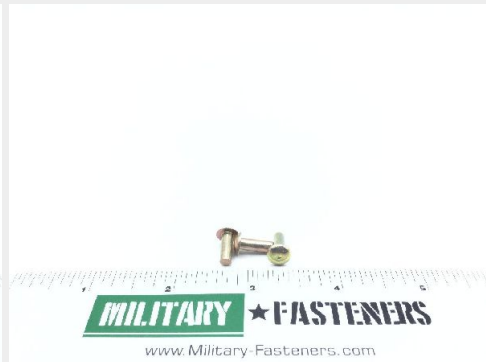

* See page 2 for technical characteristics

P/N MS20613-5P7 Specifications

Fastener Length:	0.428 Inches Minimum And 0.448 Inches Maximum
Head Style:	Universal
Head Height:	0.067 Inches Minimum And 0.077 Inches Maximum
Shank Diameter:	0.155 Inches Minimum And 0.160 Inches Maximum
Shank Style:	Straight
Head Major Diameter:	0.296 Inches Minimum And 0.328 Inches Maximum
Grip Length:	0.194 Inches Minimum And 0.214 Inches Maximum
Shear Strength:	65000 Single Pounds Per Square Inch
Heat Treatment:	Annealed Overall
Material:	Steel Comp 1010 Overall Or Steel Comp 1015 Overall Or Steel Comp 1005 Overall
Material Document And Classification:	Fed Std 66 Fed Std Single Material Response Overall
Surface Treatment:	Cadmium Overall
Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl 2 Fed Spec Single Treatment Response Overall

How to Order

Order this solid rivet from our inventory online by visiting <https://military-fasteners.com/rivets/solid+rivets/MS20613-5P7> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.