

**Description**

cable diameter: 1/16", corrosion resistant steel, 480 lbs. minimum breaking strength, MS20663 series ball end


\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information****Alternate Part Numbers**

[MS20663-C2](#) [AN663C2](#)

|                         |   |
|-------------------------|---|
| SKU / Model:            | MS20663C2                                   |
| Minimum Qty (MOQ):      | 20  |
| NSN:                    | 4030-00-273-3080                            |
| ECCN:                   | EAR99                                       |
| National Motor Freight: | 105200, Fittings Cable / Chain / Rope I / S |

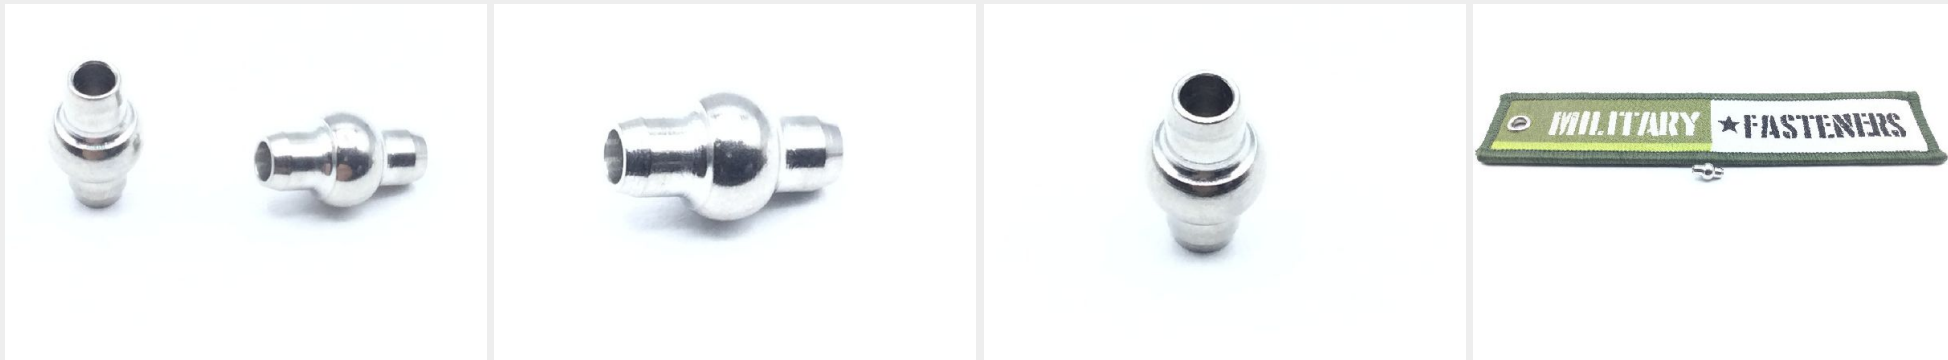

\* See page 2 for technical characteristics

## P/N MS20663C2 Specifications

|  |   |
|--|---|
| <b>Inside Diameter:</b>                | 0.073 Inches Minimum And 0.077 Inches Maximum |
| <b>Head Diameter:</b>                  | 0.203 Inches Minimum And 0.207 Inches Maximum |
| <b>Overall Length:</b>                 | 0.355 Inches Minimum And 0.370 Inches Maximum |
| <b>Plain Shank Diameter:</b>           | 0.123 Inches Minimum And 0.127 Inches Maximum |
| <b>Accommodated Material Diameter:</b> | 0.062 Inches Nominal                          |
| <b>Material:</b>                       | Steel Corrosion Resisting                     |
| <b>Surface Treatment:</b>              | Passivate                                     |
| <b>Style Designator:</b>               | Oval With Double Shank                        |

## How to Order

Order this wire rope swaging ball end from our inventory online by visiting <https://military-fasteners.com/fittings/wire+rope+swaging+ball+ends/MS20663C2> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.