

Description


outer diameter: 3/16", flared tube, aluminum alloy, MS20819 series fitting

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS208193D
Minimum Qty (MOQ):	20
NSN:	4730-01-163-6996
ECCN:	9A991.d
National Motor Freight:	051400, Pipe Fittings Aluminum

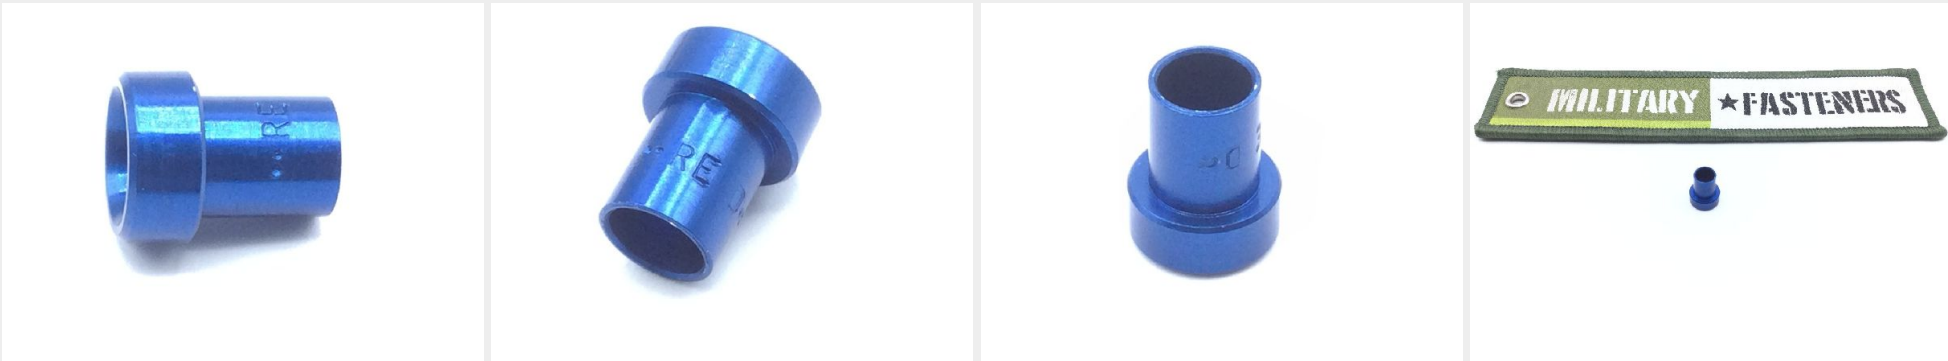

P/N MS20819-3D Specifications

Casehardening Indicator:	Not Casehardened
Overall Length:	0.390 Inches Minimum And 0.422 Inches Maximum
Flange Width:	0.125 Inches Minimum And 0.157 Inches Maximum
Flange Outside Diameter:	0.329 Inches Minimum And 0.332 Inches Maximum
Seat Angle In Deg:	32.0
Sleeve Outside Diameter:	0.234 Inches Minimum And 0.237 Inches Maximum
Hose/tube Outside Diameter For Which Designed:	0.188 Inches Nominal
Material:	Aluminum Alloy, Qq-a-225/4, Alloy 2014, T6
Material:	Aluminum Alloy, Qq-a-367, Alloy 7075, T73
Surface Treatment:	Anodize
Style Designator:	Sleeve
Surface Treatment:	Anodized, Mil-a-8625, Type 2
Specification/standard Data:	96906-ms20819-3d Government Standard

How to Order

Order this flared tube fitting sleeve from our inventory online by visiting <https://military-fasteners.com/fittings/flared+tube+fitting+sleeves/MS20819-3D> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.