

**Description**


outer diameter: 3/16", flared tube, aluminum alloy, MS20819 series fitting

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS208193D
Minimum Qty (MOQ):	20
NSN:	4730-01-163-6996
ECCN:	9A991.d
National Motor Freight:	051400, Pipe Fittings Aluminum

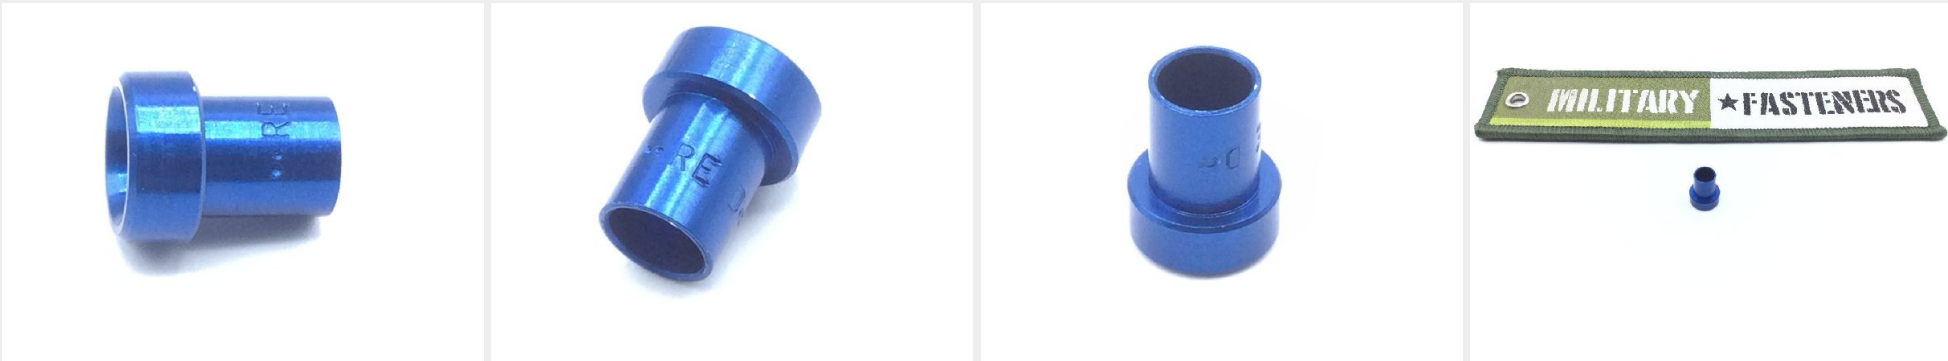

## P/N MS20819-3D Specifications

<b>Casehardening Indicator:</b>	Not Casehardened
<b>Overall Length:</b>	0.390 Inches Minimum And 0.422 Inches Maximum
<b>Flange Width:</b>	0.125 Inches Minimum And 0.157 Inches Maximum
<b>Flange Outside Diameter:</b>	0.329 Inches Minimum And 0.332 Inches Maximum
<b>Seat Angle In Deg:</b>	32.0
<b>Sleeve Outside Diameter:</b>	0.234 Inches Minimum And 0.237 Inches Maximum
<b>Hose/tube Outside Diameter For Which Designed:</b>	0.188 Inches Nominal
<b>Material:</b>	Aluminum Alloy, Qq-a-225/4, Alloy 2014, T6
<b>Material:</b>	Aluminum Alloy, Qq-a-367, Alloy 7075, T73
<b>Surface Treatment:</b>	Anodize
<b>Style Designator:</b>	Sleeve
<b>Surface Treatment:</b>	Anodized, Mil-a-8625, Type 2
<b>Specification/standard Data:</b>	96906-ms20819-3d Government Standard

## How to Order

Order this flared tube fitting sleeve from our inventory online by visiting <https://military-fasteners.com/fittings/flared+tube+fitting+sleeves/MS20819-3D> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.