

Description


thread: 10-32, self locking, regular height, aluminum alloy, nylon insert, anodized

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

| | |
|-------------------------|-------------------|
| SKU / Model: | MS21044D3 |
| Minimum Qty (MOQ): | 25 |
| NSN: | 5310-00-877-5798 |
| ECCN: | EAR99 |
| National Motor Freight: | 013540, Alum Nuts |

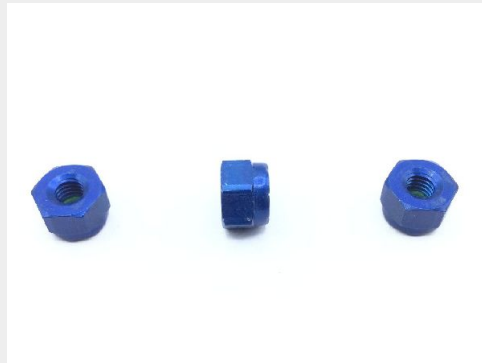

P/N MS21044D3 Specifications

| | |
|---|---|
| Thread Class: | 3b |
| Thread Direction: | Right-hand |
| Locking Feature: | Prevailing Torque With Nonmetallic Insert |
| Lubrication: | Soluble Lubricant |
| Nut Style: | Hexagon |
| Nut Height: | 0.208 Inches Minimum And 0.281 Inches Maximum |
| Width Across Flats: | 0.367 Inches Minimum And 0.376 Inches Maximum |
| Temp Rating: | 250.0 Deg Fahrenheit Nominal |
| Thread Series: | Unjf |
| Thread Quantity Per Inch: | 32 |
| Nominal Thread Size: | 0.190 Inches |
| Countersink Angle: | 88.0 Degrees Nominal Nut |
| Bearing Surface Type: | Chamfered Or Washer Faced |
| Bearing Surface Finish: | 125.0 Microinches |
| Material: | Aluminum Locking Insert |
| Material: | Plastic Polyamide Overall Except Insert |
| Surface Treatment: | Anodize Overall Except Insert And Chromate Overall Except Insert |
| Surface Treatment Document And Classification: | Mil-a-8625 Mil Spec 1st Treatment Response Overall Except Insert And Mil-c-5541 Mil Spec 2nd Treatment Response Overall Except Insert |

How to Order

Order this self-locking hexagon nut from our inventory online by visiting https://military-fasteners.com/nuts/self_locking+hexagon+nuts/MS21044D3 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.