

Description


thread: 3/4-16, self locking, regular height, cadmium plated steel, nylon insert, MS21044 series nut

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS21044N12
Minimum Qty (MOQ):	10
NSN:	5310-00-982-6810
Schedule B:	7318.16.0085
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

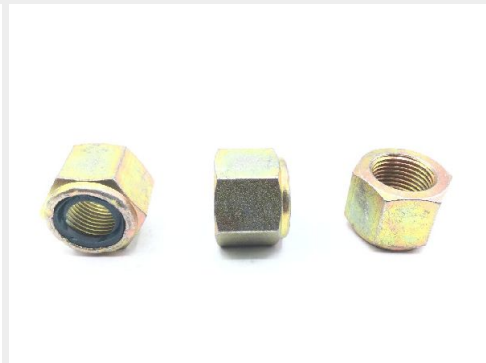

P/N MS21044N12 Specifications

Thread Class:	3b
Thread Direction:	Right-hand
Locking Feature:	Prevailing Torque With Nonmetallic Insert
Lubrication:	Soluble Lubricant
Nut Style:	Hexagon
Nut Height:	0.855 Inches Minimum And 0.891 Inches Maximum
End Item Identification:	W/s: Aircraft, C-2a (reprocured); Radar Set, Firefinder (an/tpq-36); Elevators, Aircraft; Airborne Mobile Dir Air Spt Ctl (2id), (02m Jul83) (an/uyq-3a); Fire Pumps; Shipboard Material Handling Equipment (mhe); Elevators, Cargo/weapons; Support Equipment, B-1 Aircraft; Aircraft, (ac-130h, Mc-130h, Ec-130e, Hc-130)
Width Across Flats:	1.052 Inches Minimum And 1.064 Inches Maximum
Temp Rating:	250.0 Deg Fahrenheit Nominal
Thread Series:	Unjf
Thread Quantity Per Inch:	16
Nominal Thread Size:	0.750 Inches
Countersink Angle:	88.0 Degrees Nominal Nut
Bearing Surface Type:	Chamfered Or Washer Faced
Bearing Surface Finish:	125.0 Microinches
Material:	Steel Comp 1006 Nut Or Steel Comp 1008 Nut Or Steel Comp 1009 Nut Or Steel Comp 1010 Nut Or Steel Comp 1015 Nut Or Steel Comp 1018 Nut Or Steel Comp 1035 Nut Or Steel Comp 11137 Nut Or Steel Comp 1213 Nut Or Steel Comp 12114 Nut
Surface Treatment:	Cadmium Overall Except Insert
Surface Treatment Document And Classification:	Qq-p-416,ty 2,cl 3 Fed Spec Single Treatment Response Overall Except Insert

How to Order

Order this self-locking hexagon nut from our inventory online by visiting https://military-fasteners.com/nuts/self_locking+hexagon+nuts/MS21044N12 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.