



★ FASTENERS

Military-Fasteners.com

P/N MS21069-3

## Description


Thread Size: 1/4", Nut Length: 3/4", Nut Height: 1/4", MS21069 series nut

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	MS210693
Minimum Qty (MOQ):	50
NSN:	5310-00-728-7703
Schedule B:	7318.16.0085
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

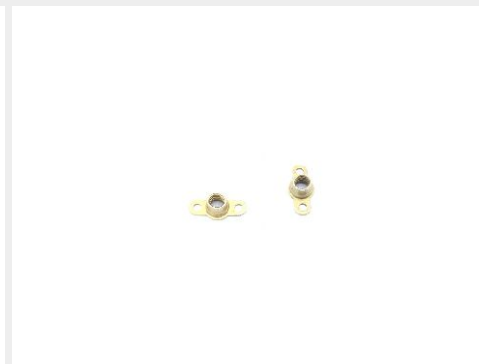

\* See page 2 for technical characteristics

## P/N MS21069-3 Specifications

<b>Thread Class:</b>	3b
<b>Thread Direction:</b>	Right-hand
<b>Locking Feature:</b>	Prevailing Torque All Metal Design
<b>Lubrication:</b>	Soluble Lubricant
<b>Mounting Hole Diameter:</b>	0.098 Inches Minimum And 0.103 Inches Maximum
<b>Nut Style:</b>	Plate
<b>Nut Length:</b>	0.724 Inches Maximum
<b>Nut Height:</b>	0.250 Inches Maximum
<b>Plate Thickness:</b>	0.047 Inches Maximum
<b>Plate Width:</b>	0.298 Inches Minimum And 0.328 Inches Maximum
<b>Nut Mounting Provision:</b>	Straight Holes
<b>Mounting Hole Arrangement Style:</b>	2 Holes
<b>Distance From Aperture Center To Mounting Hole Center:</b>	0.250 Inches Nominal
<b>Center To Center Distance Between Mounting Holes Along Length:</b>	0.498 Inches Minimum And 0.502 Inches Maximum
<b>Temp Rating:</b>	450.0 Deg Fahrenheit Nominal
<b>Thread Series:</b>	Unjf
<b>Thread Quantity Per Inch:</b>	32
<b>Hardness Rating:</b>	49.0 Rockwell C Maximum
<b>Nominal Thread Size:</b>	0.190 Inches
<b>Material:</b>	Steel Overall
<b>Surface Treatment:</b>	Cadmium Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-416,ty 2,cl 3 Fed Spec Single Treatment Response Overall

## How to Order

Order this self-locking nutplate from our inventory online by visiting [https://military-fasteners.com/nuts/self\\_locking+nutplates/MS21069-3](https://military-fasteners.com/nuts/self_locking+nutplates/MS21069-3) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.