


Description

Thread Size: 1/4", Nut Length: 51/64", Nut Height: 9/32

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

| | |
|-------------------------|---|
| SKU / Model: | MS21070L4 |
| Minimum Qty (MOQ): | 10 |
| NSN: | 5310-00-728-9459 |
| Schedule B: | 7318.16.0085 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

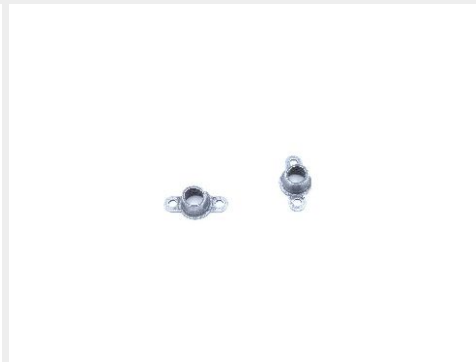

* See page 2 for technical characteristics

P/N MS21070L4 Specifications

| | |
|---|--|
| Thread Class: | 3b |
| Thread Direction: | Right-hand |
| Locking Feature: | Prevailing Torque All Metal Design |
| Lubrication: | Dry Film Lubricant |
| Mounting Hole Diameter: | 0.098 Inches Minimum And 0.103 Inches Maximum |
| Nut Style: | Plate |
| Nut Length: | 0.786 Inches Maximum |
| Nut Height: | 0.281 Inches Maximum |
| Plate Thickness: | 0.055 Inches Maximum |
| Plate Width: | 0.380 Inches Minimum And 0.414 Inches Maximum |
| Nut Mounting Provision: | Straight Holes |
| Mounting Hole Arrangement Style: | 2 Holes |
| Distance From Aperture Center To Mounting Hole Center: | 0.281 Inches Nominal |
| Center To Center Distance Between Mounting Holes Along Length: | 0.560 Inches Minimum And 0.564 Inches Maximum |
| Temp Rating: | 450.0 Deg Fahrenheit Nominal |
| Thread Series: | Unjf |
| Thread Quantity Per Inch: | 28 |
| Hardness Rating: | 49.0 Rockwell C Maximum |
| Nominal Thread Size: | 0.250 Inches |
| Material: | Iron Alloy 660 Overall |
| Material Document And Classification: | Ams 5525 Assn Std Single Material Response Overall |
| Surface Treatment: | Passivate Overall |
| Surface Treatment Document And Classification: | Qq-p-35 Fed Spec Single Treatment Response Overall |

How to Order

Order this self-locking nutplate from our inventory online by visiting https://military-fasteners.com/nuts/self_locking+nutplates/MS21070L4 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.