

P/N MS21075L3

Description

Thread: 10-32, Thread Size: 3/16", Nut Length: 47/64", Nut Height: 1/4", two lug, floating, dry film, MS21075 series nut

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

Alternate Part Numbers

MS21075L3N

SKU / Model: MS21075L3


Minimum Qty (MOQ): 25

NSN: 5310-00-772-3720

Schedule B: 7318.16.0030

ECCN: EAR99

National Motor Freight: 093486, Bolts, nuts Or Screws, Noi (sub 3)

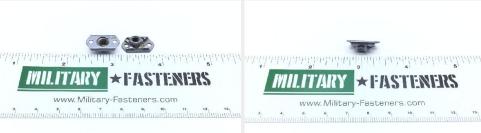







^{*} See page 2 for technical characteristics

P/N MS21075L3 Specifications

| Thread Class: | 3b |
|--|---|
| Thread Direction: | Right-hand |
| Locking Feature: | Prevailing Torque All Metal Design |
| Lubrication: | Dry Film Lubricant |
| Mounting Hole Diameter: | 0.098 Inches Minimum And 0.103 Inches Maximum |
| Nut Style: | Plate |
| Nut Length: | 0.739 Inches Maximum |
| Nut Height: | 0.250 Inches Maximum |
| Plate Thickness: | 0.140 Inches Maximum |
| Plate Width: | 0.290 Inches Minimum And 0.416 Inches Maximum |
| Nut Mounting Provision: | Straight Holes |
| Mounting Hole Arrangement Style: | 2 Holes |
| Distance From Aperture Center To Mounting Hole Center: | 0.245 Inches Minimum And 0.255 Inches Maximum |
| Center To Center Distance Between Mounting Holes Along Length: | 0.498 Inches Minimum And 0.502 Inches Maximum |
| Temp Rating: | 450.0 Deg Fahrenheit Nominal |
| Thread Series: | Unjf |
| Features Provided: | Floating Nut |
| Thread Quantity Per Inch: | 32 |
| Hardness Rating: | 49.0 Rockwell C Maximum |
| Nominal Thread Size: | 0.190 Inches |
| Material: | Steel Overall |
| Surface Treatment: | Cadmium Overall |
| Surface Treatment Document And Classification: | Qq-p-416,ty 2,cl 3 Fed Spec Single Treatment Response Overall |

How to Order

Order this self-locking nutplate from our inventory online by visiting https://military-fasteners.com/nuts/self_locking+nutplates/MS21075L3 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check outhere to complete your order.