


Description

Fastener Length: 7/8", Thread: 4-40, Thread Length: 7/8

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	MS210900417
Minimum Qty (MOQ):	50
NSN:	5305-00-224-9243
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

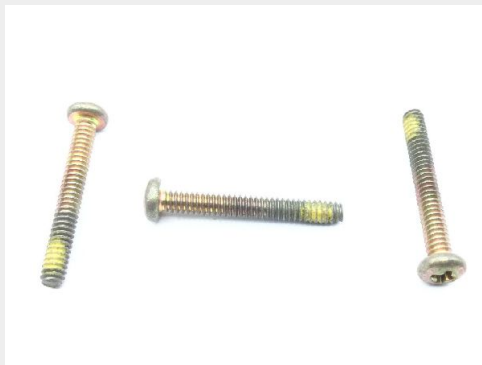

P/N MS21090-0417 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.794 Inches Minimum And 0.875 Inches Maximum
Fastener Length:	0.844 Inches Minimum And 0.875 Inches Maximum
Head Style:	Pan
Head Diameter:	0.205 Inches Minimum And 0.219 Inches Maximum
Head Height:	0.070 Inches Minimum And 0.080 Inches Maximum
Locking Feature:	Patch Threads Or Pellet Threads Or Strip Threads
Internal Drive Style:	Cross Recess Type 1
End Item Identification:	W/s: Helicopter, Seahawk H-60; Helicopter, Carrier Based Asw, Sh-60f; Helicopter, Search And Rescue, Hh-60h; Helicopter, Uscg Search And Rescue, Hh-60j; Aircraft, F-16; Aircraft, Intruder A-6e; Aircraft, Prowler Ea-6b; Helicopter, Lamps Mark Iii, Sh-60b
Nominal Thread Diameter:	0.112 Inches
Thread Quantity Per Inch:	40
Minimum Tensile Strength:	60000 Pounds Per Square Inch
Material:	Steel Overall
Material Document And Classification:	Qq-s-637 Fed Spec Single Material Response Overall Or 66 Fed Std Single Material Response Overall
Surface Treatment:	Cadmium Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,type 2,class 3 Fed Spec All Treatment Responses Overall
Thread Series Designator:	Unc
Nondefinitive Spec/std Data:	3 Type And 9c Style

How to Order

Order this socket head cap screw from our inventory online by visiting <https://military-fasteners.com/screws/socket+head+cap+screws/MS21090-0417> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.