

Description


Fastener Length: 5-5/8", Thread: 3/4-16, Thread Length: 1-1/32

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS2125012074
Minimum Qty (MOQ):	1
NSN:	5306-01-445-6724
Schedule B:	7318.15.8085
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

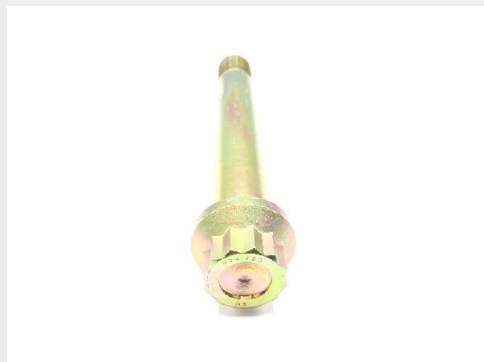

P/N MS21250-12074 Specifications

Thread Class:	3a
Thread Direction:	Right-hand
Thread Length:	1.036 Inches Minimum
Fastener Length:	5.681 Inches Nominal
Head Style:	Double Hexagon W/hole
Head Height:	0.711 Inches Nominal
Width Between Flats:	0.797 Inches Minimum And 0.812 Inches Maximum
Extended Washer Diameter:	1.220 Inches Minimum And 1.230 Inches Maximum
Extended Washer Thickness:	0.178 Inches Nominal
Grip Diameter:	0.7480 Inches Minimum And 0.7490 Inches Maximum
Nominal Thread Diameter:	0.750 Inches
Grip Length:	4.625 Inches Nominal
Thread Quantity Per Inch:	16
Minimum Tensile Strength:	1800000 Pounds Per Square Inch
Material:	Steel Overall
Surface Treatment:	Cadmium Overall
Thread Series Designator:	Unjf

How to Order

Order this shear bolt from our inventory online by visiting <https://military-fasteners.com/bolts/shear+bolts/MS21250-12074> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.