

Description

Length: 12.75", sheet thickness: 0.85"-.128", Teflon per AMS 3652 and ASTM D4895, MS21266 series grommet


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[STC21266-3T](#) [BACG20Z-P](#) [BACG20Z-C](#)

SKU / Model:	MS212663T
Minimum Qty (MOQ):	5
NSN:	5325-00-914-1008
Schedule B:	3926.90.9996
ECCN:	EAR99
National Motor Freight:	095190, Hardware, Noi

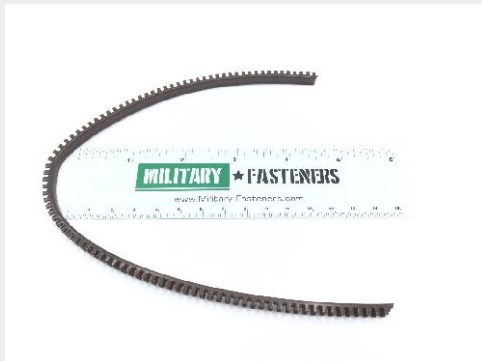

* See page 2 for technical characteristics

P/N MS21266-3T Specifications

Groove Depth:	0.100 Inches Nominal
Groove Width:	0.131 Inches Nominal
Overall Height:	0.220 Inches Nominal
Overall Width:	0.155 Inches Nominal
Tab Width:	0.067 Inches Nominal
Grommet Style:	Edging
Width Between Tabs:	0.067 Inches Nominal
Grommet Construction Type:	Split
Grommet Overall Length:	12.620 Inches Minimum And 19.000 Inches Maximum
Color:	Any Acceptable Overall
Material:	Plastic Polytetrafluoroethylene Overall

How to Order

Order this nonmetallic grommet from our inventory online by visiting <https://military-fasteners.com/grommets/nonmetallic+grommets/MS21266-3T> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.