

**Description**


Hole Diameter: 5/8",

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS21299C10K
Minimum Qty (MOQ):	10
NSN:	5310-01-573-7816
ECCN:	EAR99
National Motor Freight:	097510, Washers I / S Chromium / Nickel Plated

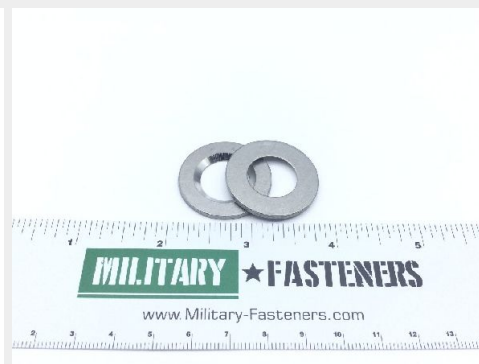

\* See page 2 for technical characteristics

# P/N MS21299C10K Specifications

Hole Diameter:	0.627 Inches Minimum And 0.631 Inches Maximum
Outside Diameter:	1.182 Inches Minimum And 1.192 Inches Maximum
Recess Diameter:	0.778 Inches Minimum And 0.788 Inches Maximum
Material Thickness:	0.071 Inches Minimum And 0.085 Inches Maximum
Hardness Rating:	35.0 Rockwell C Minimum And 42.0 Rockwell C Maximum
Recess Angle:	90.0 Degrees Nominal
Part Name Assigned By Controlling Agency:	Washer Recessed
Material:	Steel Comp 630 Overall
Surface Treatment:	Passivate Overall
Style Designator:	15 Recessed

## How to Order

Order this flat washer from our inventory online by visiting <https://military-fasteners.com/washers/flat+washers/MS21299C10K> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.