

Description

outside diameter: 5/8", aluminum alloy 2024, adapter flareless tube to flared tube, MS21900 series fitting


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

Alternate Part Numbers

MS21900W10		
SKU / Model:	MS21900D10	
Minimum Qty (MOQ):	1	
NSN:	4730-00-640-5100	
Schedule B:	7616.99.5090	
ECCN:	EAR99	
National Motor Freight:	051400, Pipe Fittings Aluminum	

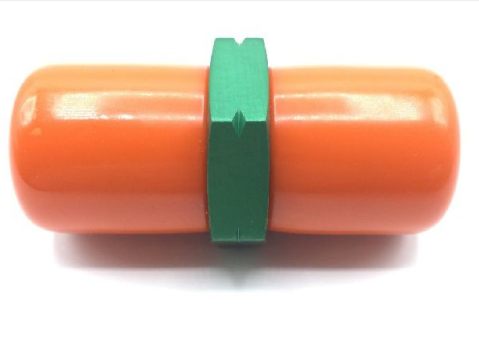

* See page 2 for technical characteristics

P/N MS21900D10 Specifications

Thread Class:	3a All Ends
End Item Identification:	Aircraft Application
Connection Style:	External Seat For Gasket Seal (boss) 2nd End
Connection Style:	Flared W/ Gasket Seal (boss) 1st End
Connection Type:	Threaded External Boss All Ends
Nominal Thread Size:	0.875 Inches All Ends
Nominal Overall Length:	1.125 Inches
Material:	Aluminum Alloy Overall
Surface Treatment:	Zinc Overall
Surface Treatment Document And Classification:	Qq-z-325,type 2,class 1 Fed Spec Single Treatment Response Overall
Style Designator:	Flared And Flareless W/ Center Wrenching Facility
Thread Series Designator:	Unjf All Ends
Specification/standard Data:	96906-ms21900 Government Standard

How to Order

Order this boss nipple from our inventory online by visiting <https://military-fasteners.com/fittings/boss+nipples/MS21900D10> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.