

Description


outside diameter: 3/16", union, flareless, aluminum alloy, MS21902 series fitting

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS21902D3
Minimum Qty (MOQ):	2
NSN:	4730-00-142-2154
Schedule B:	7609.00.0000
ECCN:	EAR99
National Motor Freight:	051400, Pipe Fittings Aluminum

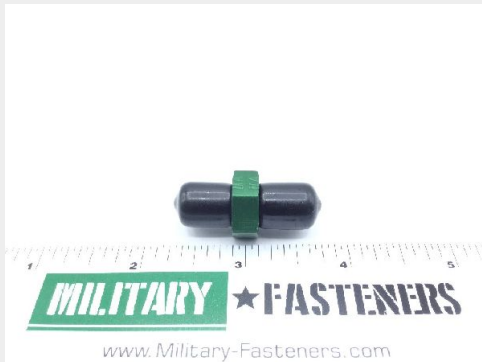

* See page 2 for technical characteristics

P/N MS21902D3 Specifications

Thread Class:	3a All Ends
Maximum Operating Temp:	-65.0 Deg Fahrenheit 1st Response
Maximum Operating Temp:	275.0 Deg Fahrenheit 2nd Response
Connection Style:	External Seat For Gasket Seal (boss) All Ends
Leg Length:	0.391 Inches Nominal 2nd End
Leg Length:	0.410 Inches Maximum 1st End
Connection Type:	Threaded External Boss All Ends
Maximum Operating Pressure:	3000.0 Pounds Per Square Inch Single Response
Nominal Thread Size:	0.375 Inches All Ends
Nominal Overall Length:	1.094 Inches
Material:	Aluminum Alloy 2024 Overall Or Aluminum Alloy 2014 Overall
Material Document And Classification:	Qq-a-225/6,t6,t62 Or T851 Fed Spec 1st Material Response Overall Or Qq-a-225/4,t6 Fed Spec 2nd Material Response Overall
Media For Which Designed:	Hydraulic Fluid 1st Response
Media For Which Designed:	Oxygen, Gaseous 2nd Response
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625,ty 2,cl 1,light Tan Mil Spec Single Treatment Response Overall
Style Designator:	Flareless (tube)
Style Designator:	Flareless W/ Center Wrenching Facility
Thread Series Designator:	Unjf All Ends
Specification/standard Data:	96906-ms21902 Government Standard

How to Order

Order this boss nipple from our inventory online by visiting <https://military-fasteners.com/fittings/boss+nipples/MS21902D3> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.