

Description


Thread Size: 1/2", flareless, green, aluminum alloy, MS21912 series fitting

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS21912D6
Minimum Qty (MOQ):	1
NSN:	4730-00-497-6478
Schedule B:	7609.00.0000
ECCN:	EAR99
National Motor Freight:	051400, Pipe Fittings Aluminum

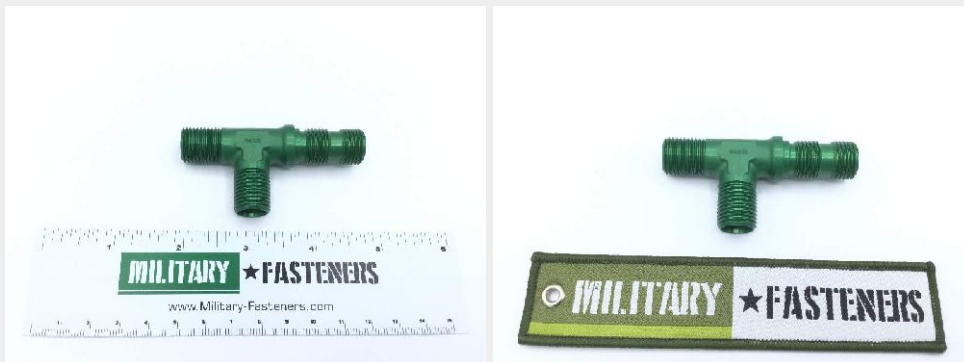

* See page 2 for technical characteristics

P/N MS21912D6 Specifications

Thread Class:	3a 1st End Bulkhead
Thread Class:	3a All Ends
Maximum Operating Temp:	275.0 Deg Fahrenheit Single Response
End Item Identification:	16n Aircraft, Viking S-3a
Connection Style:	Flareless (tube) All Ends
Leg Length:	1.063 Inches Nominal 2nd End
Leg Length:	1.063 Inches Nominal 3rd End
Leg Length:	1.688 Inches Nominal 1st End
Connection Type:	Threaded External Tube All Ends
Maximum Operating Pressure:	3000.0 Pounds Per Square Inch Single Response
Nominal Thread Size:	0.562 Inches 1st End Bulkhead
Nominal Thread Size:	0.562 Inches All Ends
Seat Angle:	12.0 Degrees All Ends
Nominal Outside Diameter Tube Accommodated:	0.375 Inches All Ends
Material:	Aluminum Alloy 7075 Overall
Material Document And Classification:	Qq-a-367,t73 Fed Spec Single Material Response Overall
Media For Which Designed:	Hydraulic Fluid Single Response
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625,type 2,class 2 Mil Spec Single Treatment Response Overall
Thread Series Designator:	Unjf All Ends
Thread Series Designator:	Unjf 1st End Bulkhead
Specification/standard Data:	96906-ms21912 Government Standard

How to Order

Order this tube tee from our inventory online by visiting <https://military-fasteners.com/fittings/tube+tees/MS21912D6> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.