

Description

tube 3/8" to 1/4", reducer, external thread, flareless tube, carbon steel, MS21916 series fitting


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[MS21916V6-4P](#)

SKU / Model:	MS2191664
Minimum Qty (MOQ):	1
NSN:	4730-00-541-4901
Schedule B:	7307.19.9080
ECCN:	EAR99
National Motor Freight:	052190, Pipe,tubing,or Pipe Or Tubing Fitti

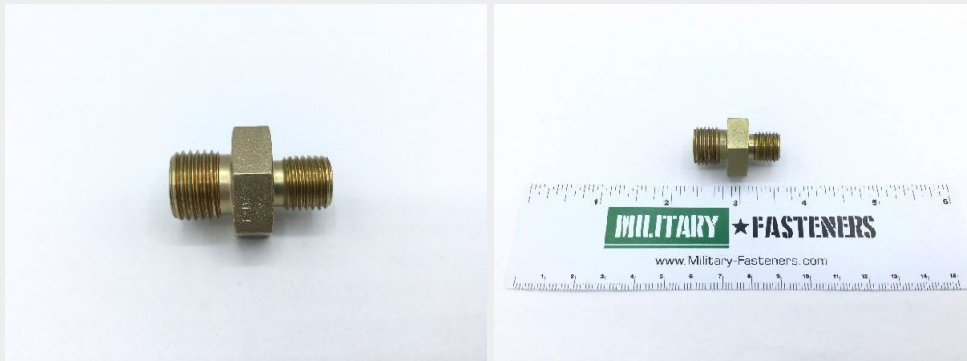

* See page 2 for technical characteristics

P/N MS21916-6-4 Specifications

Thread Class:	3a All Ends
Reducer Type:	Concentric
Maximum Operating Temp:	275.0 Deg Fahrenheit Single Response
End Item Identification:	Grumman A10 Aircraft; X2m Assault Amphibious Vehicle, Command (aavc-7a1)
Connection Style:	External Seat For Gasket Seal (boss) All Ends
Connection Type:	Threaded External Boss All Ends
Maximum Operating Pressure:	3000.0 Pounds Per Square Inch Single Response
Nominal Thread Size:	0.438 Inches 2nd End
Nominal Thread Size:	0.562 Inches 1st End
Reduced Passage Nominal Inside Diameter:	0.188 Inches All Ends
Nominal Overall Length:	1.219 Inches
Material:	Steel Comp 1137 Overall Or Steel Comp 1141 Overall Or Steel Comp 4130 Overall
Material Document And Classification:	Qq-a-367 Fed Spec Single Material Response Overall Or Astm A576-677 Assn Std Single Material Response Overall Or Mil-s-6758 Mil Spec Single Material Response Overall
Media For Which Designed:	Hydraulic Fluid Single Response
Surface Treatment:	Cadmium Overall
Surface Treatment Document And Classification:	Qq-p-416,type 2,class 2 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unjf All Ends
Specification/standard Data:	96906-ms21916 Government Standard

How to Order

Order this boss reducer from our inventory online by visiting <https://military-fasteners.com/fittings/boss+reducers/MS21916-6-4> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.