

**Description**

3/8" to 1/4", aluminum alloy, reducer, external thread, flareless tube


\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information****Alternate Part Numbers**

[MS21916D6-4](#)

SKU / Model:	MS21916W64
Minimum Qty (MOQ):	2
NSN:	4730-00-166-4191
Schedule B:	7609.00.0000
ECCN:	EAR99
National Motor Freight:	051400, Pipe Fittings Aluminum

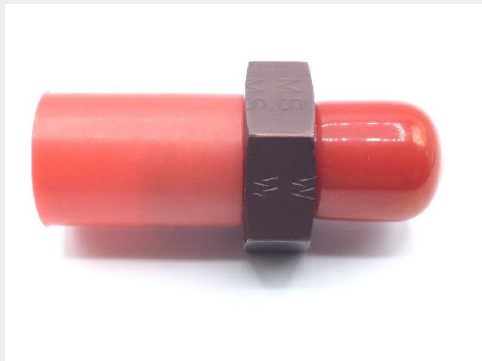

\* See page 2 for technical characteristics

## P/N MS21916W6-4 Specifications

<b>Thread Class:</b>	3a All Ends
<b>Reducer Type:</b>	Concentric
<b>Connection Style:</b>	External Seat For Gasket Seal (boss) All Ends
<b>Connection Type:</b>	Threaded External Boss All Ends
<b>Maximum Operating Pressure:</b>	3000.0 Pounds Per Square Inch Single Response
<b>Nominal Thread Size:</b>	0.438 Inches 2nd End
<b>Nominal Thread Size:</b>	0.562 Inches 1st End
<b>Nominal Overall Length:</b>	1.219 Inches
<b>Material:</b>	Aluminum Alloy Overall
<b>Material Document And Classification:</b>	Qq-a-250/12,alloy 7075 Fed Spec Single Material Response Overall
<b>Media For Which Designed:</b>	Aeronautical Fluid Single Response
<b>Surface Treatment:</b>	Anodize Outside
<b>Surface Treatment Document And Classification:</b>	Mil-a-8625 Mil Spec Single Treatment Response Outside
<b>Thread Series Designator:</b>	Unjf All Ends

## How to Order

Order this boss reducer from our inventory online by visiting <https://military-fasteners.com/fittings/boss+reducers/MS21916W6-4> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.