

**Description**


outer diameter: 3/4", corrosion resistant steel, MS21922 series fitting

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS2192212C
Minimum Qty (MOQ):	1
NSN:	4730-00-752-9626
Schedule B:	7326.90.8688
ECCN:	EAR99
National Motor Freight:	052190, Pipe,tubing,or Pipe Or Tubing Fitti

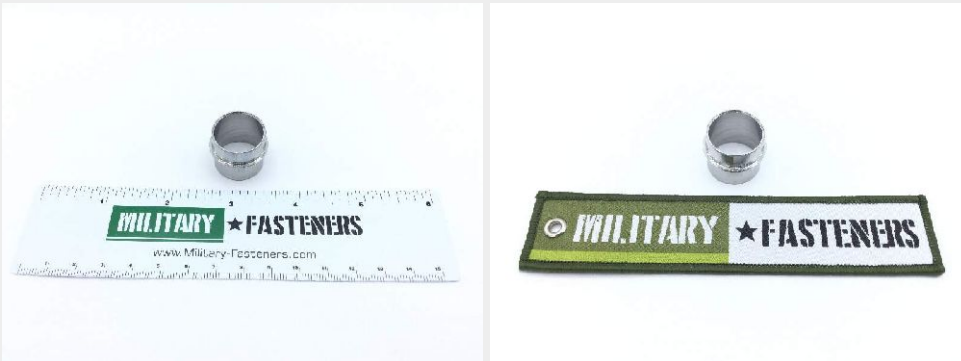

\* See page 2 for technical characteristics

## P/N MS21922-12C Specifications

<b>Casehardening Indicator:</b>	Not Casehardened
<b>Overall Length:</b>	0.750 Inches Nominal
<b>Flange Width:</b>	0.090 Inches Nominal
<b>Flange Outside Diameter:</b>	0.938 Inches Nominal
<b>Seat Angle In Deg:</b>	35.000
<b>Sleeve Outside Diameter:</b>	0.836 Inches Nominal
<b>Hose/tube Outside Diameter For Which Designed:</b>	0.750 Inches Nominal
<b>Material:</b>	Steel,corrosion Resisting,per Std Below
<b>Material:</b>	Steel,corrosion Resisting,per Std Below
<b>Surface Treatment:</b>	Passivate
<b>Style Designator:</b>	Flareless
<b>Surface Treatment:</b>	Passivated

## How to Order

Order this tube fitting clinch sleeve from our inventory online by visiting <https://military-fasteners.com/fittings/clinch+tube+fitting+sleeves/MS21922-12C> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.