

Description


tube outside diameter: 1/2", coupling, flareless, carbon steel, MS21922 series sleeve

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS219228
Minimum Qty (MOQ):	2
NSN:	4730-00-289-8618
Schedule B:	7307.92.3030
ECCN:	EAR99
National Motor Freight:	052190, Pipe,tubing,or Pipe Or Tubing Fitti

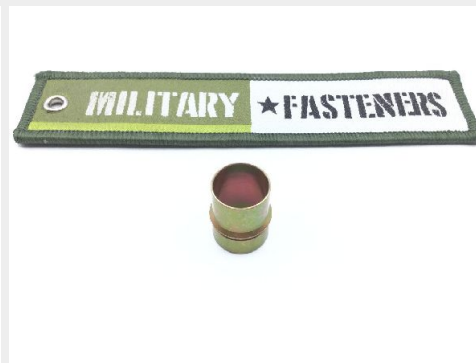

* See page 2 for technical characteristics

P/N MS21922-8 Specifications

Casehardening Indicator:	Not Casehardened
Overall Length:	0.440 Inches Minimum And 0.460 Inches Maximum
Flange Width:	0.060 Inches Minimum And 0.065 Inches Maximum
Flange Outside Diameter:	0.312 Inches Nominal
Seat Angle In Deg:	37.0
Sleeve Outside Diameter:	0.252 Inches Minimum And 0.256 Inches Maximum
Hose/tube Outside Diameter For Which Designed:	0.188 Inches Nominal
Material:	Steel, Mil-s-13433, Type 1-canceled
Material:	Steel, Mil-s-13433, Type 1-canceled
Surface Treatment:	Cadmium
Style Designator:	Flareless
Surface Treatment:	Cadmium

How to Order

Order this clinch tube fitting sleeve from our inventory online by visiting <https://military-fasteners.com/fittings/clinch+tube+fitting+sleeves/MS21922-8> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.