


Description

Fastener Length: 3/16

* Manufacturer certifications are shipped with your order FREE of charge

[Order this part online](#)**Additional Information**

SKU / Model:	MS246292
Minimum Qty (MOQ):	10
NSN:	5305-00-052-6907
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

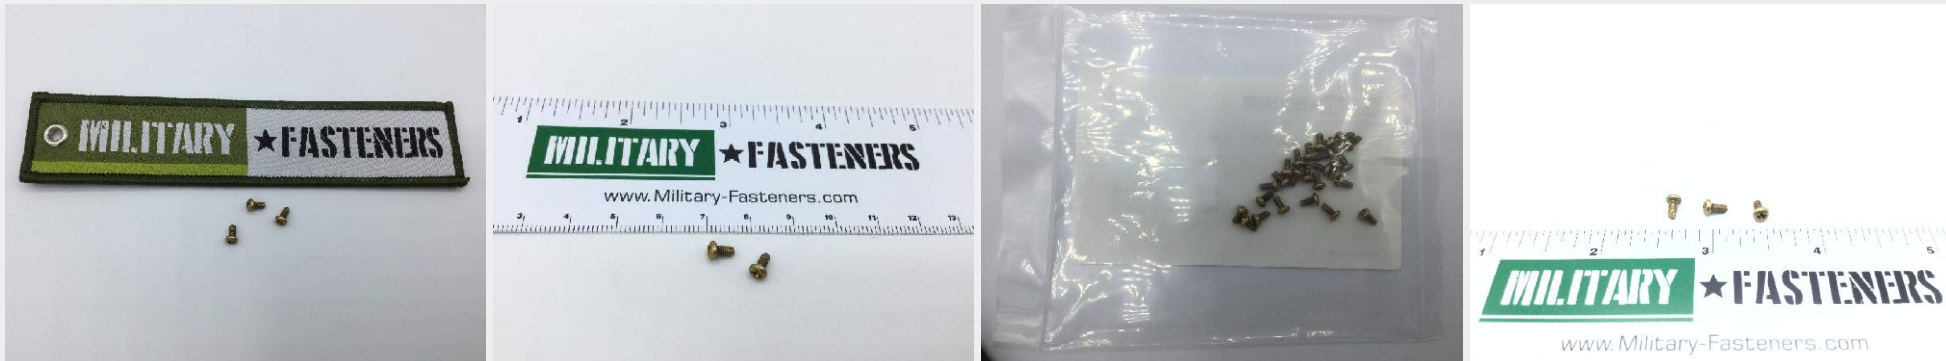

* See page 2 for technical characteristics

P/N MS24629-2 Specifications

Fastener Length:	0.156 Inches Minimum And 0.188 Inches Maximum
Head Style:	Pan
Head Diameter:	0.155 Inches Minimum And 0.167 Inches Maximum
Head Height:	0.053 Inches Minimum And 0.062 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Features Provided:	Casehardened
Nonmachine Thread Style:	Thru Slot (type D) Or Double Flute (type F) Or Thru Slot (type 6) Or Wide Flute (type T)
Nonmachine Nominal Thread Diameter:	0.086 Inches
Material:	Steel Comp 1016 Overall Or Steel Comp 1018 Overall Or Steel Comp 1019 Overall Or Steel Comp 1021 Overall Or Steel Comp 1022 Overall Or Steel Comp 1524 Overall
Material Document And Classification:	Aisi Assn Std All Material Responses Overall
Surface Treatment:	Passivate Overall And Chromate Overall
Surface Treatment Document And Classification:	Qq-p-416,ty 2 Cl 3 Fed Spec All Treatment Responses Overall

How to Order

Order this screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS24629-2> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.