

**Description**


Fastener Length: 49/64", Thread: 10-24, Head Width: 1/8", Thread Length: 5/8

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS2466722
Minimum Qty (MOQ):	5
NSN:	5305-00-068-5400
Schedule B:	7318.15.6080
ECCN:	9A991
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

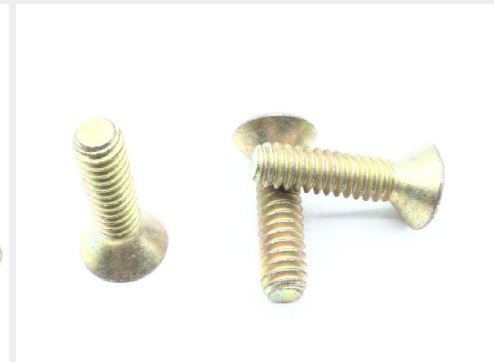

\* See page 2 for technical characteristics

## P/N MS24667-22 Specifications

<b>Thread Class:</b>	3a
<b>Thread Direction:</b>	Right-hand
<b>Thread Length:</b>	0.607 Inches Minimum And 0.639 Inches Maximum
<b>Fastener Length:</b>	0.734 Inches Minimum And 0.766 Inches Maximum
<b>Head Style:</b>	Flat Countersunk
<b>Head Diameter:</b>	0.359 Inches Minimum And 0.411 Inches Maximum
<b>Internal Drive Style:</b>	Hexagon
<b>Nominal Thread Diameter:</b>	0.190 Inches
<b>Width Across Flats:</b>	0.125 Inches Minimum And 0.127 Inches Maximum
<b>Thread Quantity Per Inch:</b>	24
<b>Minimum Tensile Strength:</b>	160000 Pounds Per Square Inch
<b>Hardness Rating:</b>	36.0 Rockwell C Minimum Overall And 43.0 Rockwell C Maximum Overall
<b>Minimum Yield Strength:</b>	130000 Pounds Per Square Inch
<b>Countersink Angle:</b>	82.0 Degrees Nominal
<b>Material:</b>	Steel Overall
<b>Surface Treatment:</b>	Cadmium Overall And Chromate Overall
<b>Surface Treatment Document And Classification:</b>	Qq-p-416,ty 2,cl 3 Fed Spec Single Treatment Response Overall
<b>Thread Series Designator:</b>	Unc

## How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS24667-22> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.