

Description


length: 1/2", thread: 10-32, black brass, countersunk, flat head

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS24693BB272
Minimum Qty (MOQ):	100
NSN:	5305-00-225-6212
ECCN:	EAR99
National Motor Freight:	096630, Screws Noi Brass / Bronze / Copper

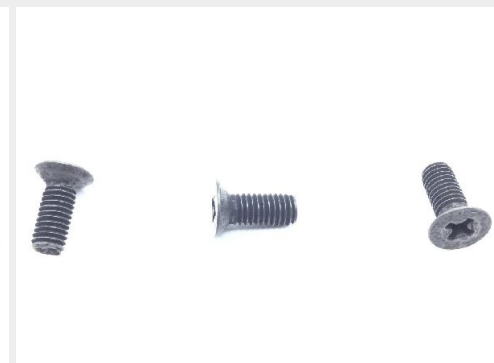

P/N MS24693BB272 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.438 Inches Minimum And 0.500 Inches Maximum
Fastener Length:	0.500 Inches Nominal
Head Style:	Flat Countersunk
Head Diameter:	0.333 Inches Minimum And 0.385 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
End Item Identification:	W/s: Aircraft, B-1b; Aircraft, Delta Dart F-106; Aircraft, Orion P-3; Aircraft, Hercules C-130; Helicopter, Utility/search And Recovery Uh-1n; Aircraft, Stratolifter C-135; Fms-a7 Aircraft; Aircraft, C-18a, Ec-18b; Aircraft, Starlifter C-141; F117a Aircraft
Nominal Thread Diameter:	0.190 Inches
Thread Quantity Per Inch:	32
Minimum Tensile Strength:	55000 Pounds Per Square Inch
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Screw Material:	Copper Alloy
Screw Material Document And Classification:	Qq-b-626 Fed Spec Single Material Response Or Qq-w-321 Fed Spec Single Material Response
Thread Series Designator:	Unf

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS24693BB272> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.