



Military-Fasteners.com

P/N MS24693BB6

Description


black brass, length: 1/2", thread: 4-40, countersunk, flat head, machine screw

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS24693BB6
Minimum Qty (MOQ):	100
NSN:	5305-00-958-9544
ECCN:	EAR99
National Motor Freight:	096630, Screws Noi Brass / Bronze / Copper

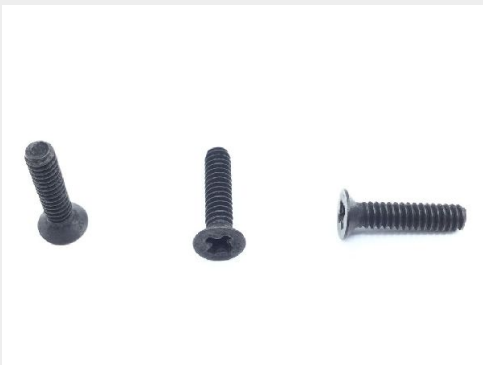

* See page 2 for technical characteristics

P/N MS24693BB6 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.370 Inches Minimum And 0.420 Inches Maximum
Fastener Length:	0.469 Inches Minimum And 0.500 Inches Maximum
Head Style:	Flat Countersunk
Head Diameter:	0.191 Inches Minimum And 0.225 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.112 Inches
Thread Quantity Per Inch:	40
Minimum Tensile Strength:	55000 Pounds Per Square Inch
Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Screw Material:	Copper Alloy 230 Or Copper Alloy 240 Or Copper Alloy 260 Or Copper Alloy 268 Or Copper Alloy 342 Or Copper Alloy 353 Or Copper Alloy 360 Or Copper Alloy 377 Or Copper Alloy 764 Or Copper Alloy 270 Or Copper Alloy 274 Or Copper Alloy 510 Or Copper Alloy 745 Or Copper Alloy 752 Or Copper Alloy 770
Thread Series Designator:	Unc

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS24693BB6> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.