

Description

length: 3/4", thread: 4-40, countersunk, flat head, black brass


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[MS24693-BB8](#)

SKU / Model:	MS24693BB8
Minimum Qty (MOQ):	100
NSN:	5305-00-999-4095
ECCN:	EAR99
National Motor Freight:	093460, Bolts / Nuts Noi Bbc / Zinc

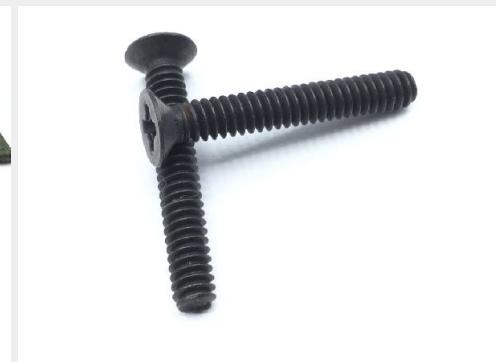

* See page 2 for technical characteristics

P/N MS24693BB8 Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.700 Inches Minimum And 0.750 Inches Maximum
Fastener Length:	0.750 Inches Nominal
Head Style:	Flat Countersunk
Head Diameter:	0.191 Inches Minimum And 0.225 Inches Maximum
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.112 Inches
Thread Quantity Per Inch:	40
Countersink Angle:	99.0 Degrees Minimum And 100.0 Degrees Maximum
Screw Material:	Copper Alloy 268 Or Copper Alloy 260 Or Copper Alloy 230 Or Copper Alloy 377 Or Copper Alloy 360 Or Copper Alloy 353 Or Copper Alloy 270 Or Copper Alloy 462 Or Copper Alloy 464 Or Copper Alloy 482 Or Copper Alloy 485 Or Copper Alloy 510 Or Copper Alloy 745 Or Copper Alloy 752 Or Copper Alloy 757 Or Copper Alloy 764 Or Copper Alloy 770 Or Copper Alloy 240 Or Copper Alloy 342
Thread Series Designator:	Unc

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS24693BB8> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.