


Description

Fastener Length: 3/8", Thread: 1/4-20, Thread Length: 3/8",

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information****Alternate Part Numbers**[MS24693-S92](#)

| | |
|-------------------------|---|
| SKU / Model: | MS24693S92 |
| Minimum Qty (MOQ): | 100 |
| NSN: | 5305-00-781-3921 |
| Schedule B: | 7318.15.6080 |
| ECCN: | EAR99 |
| National Motor Freight: | 093486, Bolts,nuts Or Screws, Noi (sub 3) |

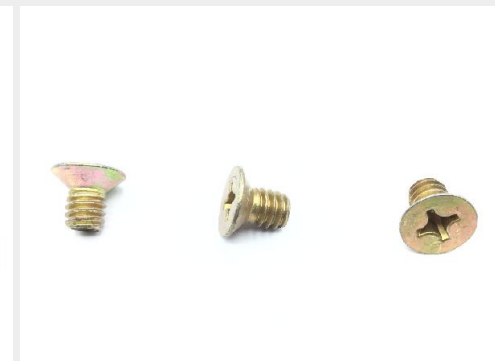

* See page 2 for technical characteristics

P/N MS24693S92 Specifications

| | |
|---|--|
| Thread Class: | 2a |
| Thread Direction: | Right-hand |
| Thread Length: | 0.275 Inches Minimum And 0.375 Inches Maximum |
| Fastener Length: | 0.375 Inches Nominal |
| Head Style: | Flat Countersunk |
| Head Diameter: | 0.442 Inches Minimum And 0.507 Inches Maximum |
| Internal Drive Style: | Cross Recess Type 1 |
| Nominal Thread Diameter: | 0.250 Inches |
| Thread Quantity Per Inch: | 20 |
| Minimum Tensile Strength: | 60000 Pounds Per Square Inch |
| Countersink Angle: | 99.0 Degrees Minimum And 101.0 Degrees Maximum |
| Screw Material: | Steel Comp 1010 |
| Screw Material Document And Classification: | Qq-s-630 Fed Spec Single Material Response Or Qq-s-631 Fed Spec Single Material Response Or Qq-s-634 Fed Spec Single Material Response |
| Screw Surface Treatment: | Cadmium And Chromate |
| Screw Surface Treatment Document And Classification: | Qq-p-416 Ty 2 Cl 3 Fed Spec All Treatment Responses |
| Thread Series Designator: | Unc |

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS24693S92> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.