

Description

grip range: 0.065" - 0.106", thread: 8-32, aluminum, countersunk head


* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information**Alternate Part Numbers**

[A8-106](#) [AEIA8-106](#) [NAS1330A08-106](#) [MS27130-A93](#)

SKU / Model:	MS27130A93
Minimum Qty (MOQ):	50
NSN:	5310-01-164-4694
ECCN:	EAR99
National Motor Freight:	013540, Alum Nuts

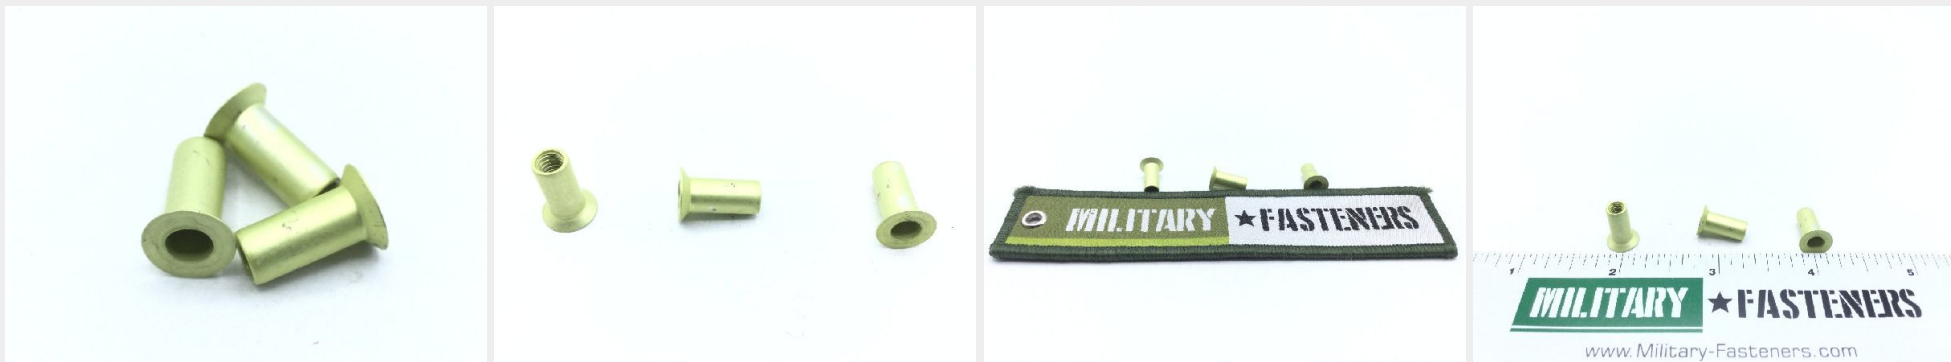

* See page 2 for technical characteristics

P/N MS27130A93 Specifications

Thread Class:	3b
Thread Direction:	Right-hand
Head Style:	Flat Countersunk
Head Diameter:	0.355 Inches Nominal
Nut Style:	Blind Rivet W/smooth Round Shank
Nut Diameter:	0.217 Inches Minimum And 0.221 Inches Maximum
Nut Length:	0.485 Inches Minimum And 0.515 Inches Maximum
Err Default:	+0.065/+0.106 Inches
Shank End Type:	Open
Thread Series:	Unc
Thread Quantity Per Inch:	32
Nominal Thread Size:	0.164 Inches
Head Countersink Angle:	99.0 Degrees Minimum And 101.0 Degrees Maximum
Material:	Aluminum Alloy 6053 Overall
Material Document And Classification:	Qq-a-430,t4 Fed Spec Single Material Response Overall
Surface Treatment:	Anodize Overall
Surface Treatment Document And Classification:	Mil-a-8625,type 2 Mil Spec Single Treatment Response Overall
Supplementary Features:	Supersedes Nas1330a08-106 Replaces Nsn5310-00-079-2368
Specification/standard Data:	96906-ms27130 Government Standard

How to Order

Order this plain blind rivet nut from our inventory online by visiting <https://military-fasteners.com/nuts/plain+blind+rivet+nuts/MS27130A93> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.