

**Description**


tubing outer diameter: 3/8, preformed packing, hydrocarbon fuel resistant, tube fitting

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS2951206
Minimum Qty (MOQ):	50
NSN:	5331-00-263-8030
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

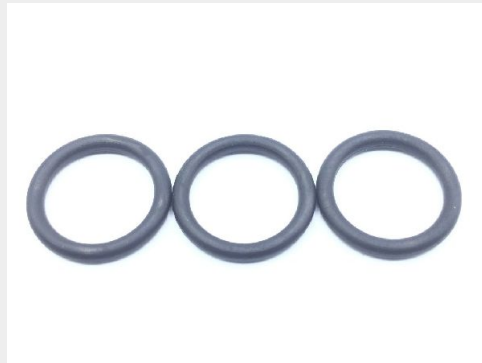

## P/N MS29512-06 Specifications

<b>Outside Diameter:</b>	0.613 Inches Minimum And 0.635 Inches Maximum
<b>Cross-sectional Height:</b>	0.075 Inches Minimum And 0.081 Inches Maximum
<b>Center Hole Diameter:</b>	0.463 Inches Minimum And 0.473 Inches Maximum
<b>Material:</b>	Rubber Butadiene-acrylonitrile Class Nbr

## How to Order

Order this o-ring from our inventory online by visiting [https://military-fasteners.com/o\\_rings/o\\_rings/MS29512-06](https://military-fasteners.com/o_rings/o_rings/MS29512-06) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.