

## Description


inner diameter: 0.364, thickness: 0.070", preformed packing, hydrocarbon fuel resistant, MS29513 series oring

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

SKU / Model:	MS29513012
Minimum Qty (MOQ):	50
NSN:	5331-00-248-3836
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

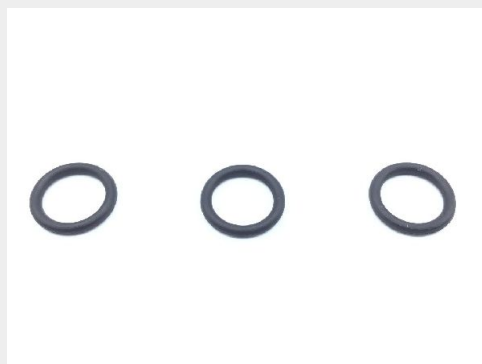

\* See page 2 for technical characteristics

## P/N MS29513-012 Specifications

<b>Outside Diameter:</b>	0.504 Inches Nominal
<b>Temp Rating:</b>	-65.0 Deg Fahrenheit And 200.0 Deg Fahrenheit
<b>Cross-sectional Height:</b>	0.067 Inches Minimum And 0.073 Inches Maximum
<b>Center Hole Diameter:</b>	0.359 Inches Minimum And 0.369 Inches Maximum
<b>Elongation Percentage:</b>	200 Maximum
<b>Material:</b>	Rubber Butadiene-acrylonitrile Class Nbr

## How to Order

Order this o-ring from our inventory online by visiting [https://military-fasteners.com/o\\_rings/o\\_rings/MS29513-012](https://military-fasteners.com/o_rings/o_rings/MS29513-012) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.