

**Description**


inner diameter: 1.176, thickness: 0.070", preformed packing o-ring, hydrocarbon fuel resistant

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS29513025
Minimum Qty (MOQ):	25
NSN:	5331-00-166-5989
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

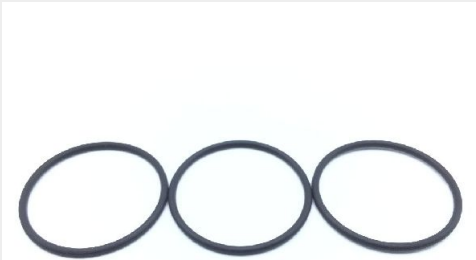

\* See page 2 for technical characteristics

# P/N MS29513-025 Specifications

Outside Diameter:	1.316 Inches Nominal
Cross-sectional Height:	0.067 Inches Minimum And 0.073 Inches Maximum
Center Hole Diameter:	1.170 Inches Minimum And 1.182 Inches Maximum
Elongation Percentage:	200 Maximum
Hardness Rating:	65.0 Shore Durometer A Nominal
Criticality Code Justification:	Adyt
Criticality Code Justification:	Zzzw
Material:	Rubber Butadiene-acrylonitrile Class Nbr
Departure From Cited Document:	Cleaning, Packaging, And Marking law Mil-std-1330d

## How to Order

Order this o-ring from our inventory online by visiting [https://military-fasteners.com/o\\_rings/o\\_rings/MS29513-025](https://military-fasteners.com/o_rings/o_rings/MS29513-025) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.