

Description


inner diameter: 1.239", thickness 0.070", preformed packing o-ring, hydrocarbon fuel resistant

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS29513026
Minimum Qty (MOQ):	25
NSN:	5331-00-003-9157
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

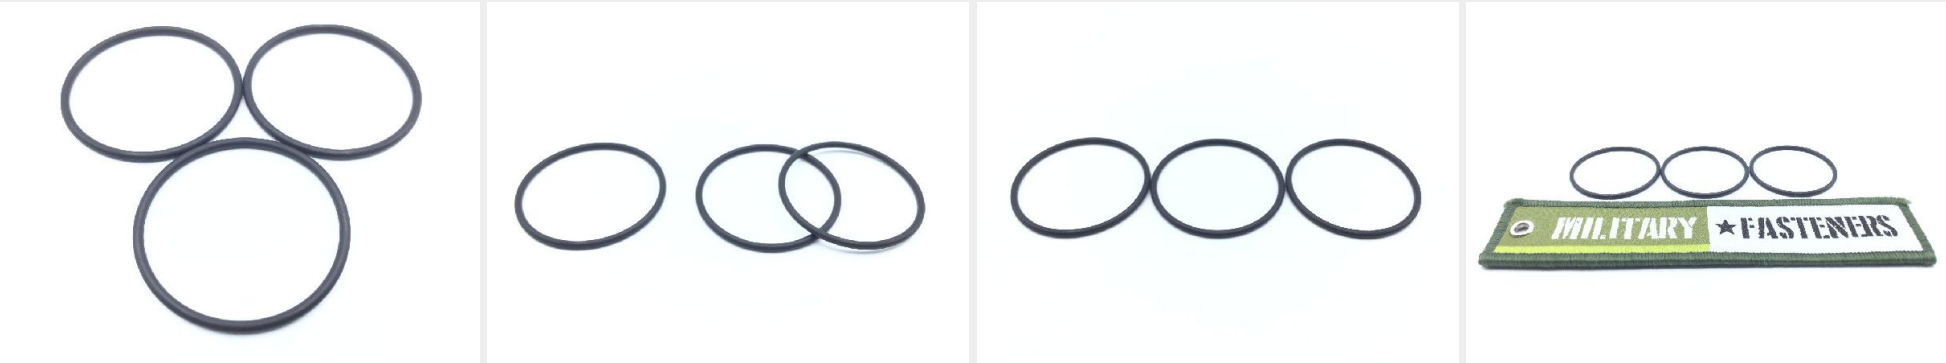

\* See page 2 for technical characteristics

## P/N MS29513-026 Specifications

<b>Outside Diameter:</b>	1.362 Inches Minimum And 1.396 Inches Maximum
<b>Cross-sectional Height:</b>	0.067 Inches Minimum And 0.073 Inches Maximum
<b>Center Hole Diameter:</b>	1.233 Inches Minimum And 1.245 Inches Maximum
<b>Material:</b>	Rubber Butadiene-acrylonitrile Class Nbr
<b>Material Document And Classification:</b>	Mil-p-5315 Mil Spec Single Material Response

## How to Order

Order this o-ring from our inventory online by visiting [https://military-fasteners.com/o\\_rings/o\\_rings/MS29513-026](https://military-fasteners.com/o_rings/o_rings/MS29513-026) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.