

Description




inner diameter: 2.114", thickness 0.070", preformed packing o-ring, hydrocarbon fuel resistant

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS29513034
Minimum Qty (MOQ):	25
NSN:	5331-00-435-9355
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

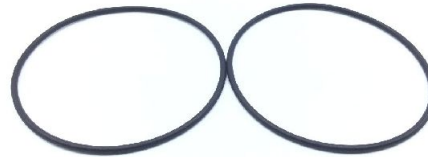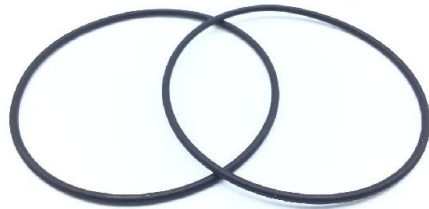

P/N MS29513-034 Specifications

Outside Diameter:	2.230 Inches Minimum And 2.278 Inches Maximum
Outside Diameter:	2.250 Inches Nominal
Temp Rating:	-70.0 Deg Fahrenheit And 180.0 Deg Fahrenheit
Cross-sectional Height:	0.067 Inches Minimum And 0.073 Inches Maximum
Center Hole Diameter:	2.104 Inches Minimum And 2.124 Inches Maximum
Center Hole Diameter:	2.107 Inches Minimum And 2.143 Inches Maximum
Hardness Rating:	70.0 Shore Durometer A Nominal
Part Name Assigned By Controlling Agency:	O-ring
Color:	Black
Material:	Rubber Butadiene-acrylonitrile Class Nbr

How to Order

Order this o-ring from our inventory online by visiting https://military-fasteners.com/o_rings/o_rings/MS29513-034 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.