

**Description**


inner diameter: 0.362", thickness 0.103", preformed packing, hydrocarbon fuel resistant, MS29513 series oring

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS29513110
Minimum Qty (MOQ):	50
NSN:	5331-00-248-3837
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

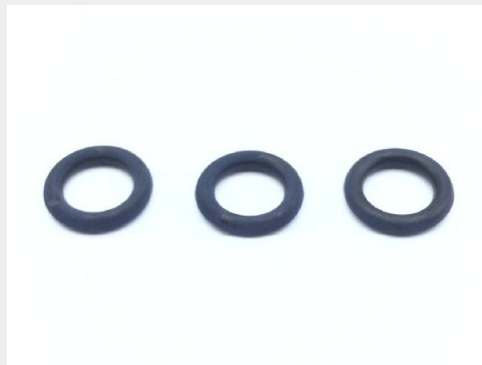

## P/N MS29513-110 Specifications

<b>Outside Diameter:</b>	0.557 Inches Minimum And 0.579 Inches Maximum
<b>Cross-sectional Height:</b>	0.100 Inches Minimum And 0.106 Inches Maximum
<b>Center Hole Diameter:</b>	0.357 Inches Minimum And 0.367 Inches Maximum
<b>End Item Identification:</b>	W/s: Guided Missile Launching System, Mk 26 (gmls); Fire Control System, Missile Mk 74 (fcs); Systems, Jp-5 Aviation Fuels; Engine, Aircraft Tf33-pw-102 (c-135e, Ec-135h/k/p); Engine, Aircraft Tf33-p-3/5/9 (c/ec-135, B-52h); Boilers, 1200 Psi; Lpd 17 Class Amphibious Transport Dock; Fire Control System, Mk 92 (fcs); Engine, Aircrft, Tf33-100 (e3a/b/c); Shipboard Material Handling Equipment (mhe)
<b>Material:</b>	Rubber Butadiene-acrylonitrile Class Nbr

## How to Order

Order this o-ring from our inventory online by visiting [https://military-fasteners.com/o\\_rings/o\\_rings/MS29513-110](https://military-fasteners.com/o_rings/o_rings/MS29513-110) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.