

## Description


inner diameter: 0.362", thickness 0.103", preformed packing, hydrocarbon fuel resistant, MS29513 series oring

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

## Additional Information

|                         |   |
|-------------------------|---|
| SKU / Model:            | MS29513110                                |
| Minimum Qty (MOQ):      | 50  |
| NSN:                    | 5331-00-248-3837                          |
| ECCN:                   | EAR99                                     |
| National Motor Freight: | 194120, Washers / Gaskets / Pckg Dvcs Noi |

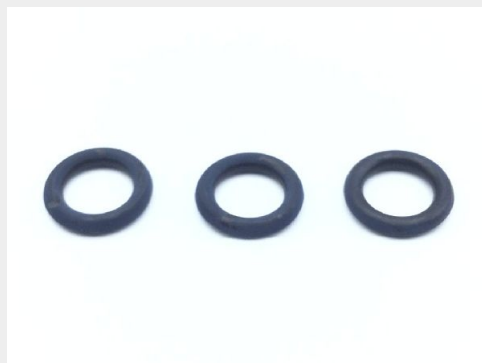

\* See page 2 for technical characteristics

## P/N MS29513-110 Specifications

|                                 |  |
|---------------------------------|--|
| <b>Outside Diameter:</b>        | 0.557 Inches Minimum And 0.579 Inches Maximum  |
| <b>Cross-sectional Height:</b>  | 0.100 Inches Minimum And 0.106 Inches Maximum  |
| <b>Center Hole Diameter:</b>    | 0.357 Inches Minimum And 0.367 Inches Maximum  |
| <b>End Item Identification:</b> | W/s: Guided Missile Launching System, Mk 26 (gmls); Fire Control System, Missile Mk 74 (fcs); Systems, Jp-5 Aviation Fuels; Engine, Aircraft Tf33-pw-102 (c-135e, Ec-135h/k/p); Engine, Aircraft Tf33-p-3/5/9 (c/ec-135, B-52h); Boilers, 1200 Psi; Lpd 17 Class Amphibious Transport Dock; Fire Control System, Mk 92 (fcs); Engine, Aircrft, Tf33-100 (e3a/b/c); Shipboard Material Handling Equipment (mhe) |
| <b>Material:</b>                | Rubber Butadiene-acrylonitrile Class Nbr   |

## How to Order

Order this o-ring from our inventory online by visiting [https://military-fasteners.com/o\\_rings/o\\_rings/MS29513-110](https://military-fasteners.com/o_rings/o_rings/MS29513-110) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.