

P/N MS29513-119

Description

inner diameter: 0.924", thickness 0.103", preformed packing o-ring, hydrocarbon fuel resistant

* Manufacturer certifications are shipped with your order EREE of charge

Order this part online

Additional Information


SKU / Model: MS29513119

Minimum Qty (MOQ): 20

NSN: 5331-00-250-0228

ECCN: EAR99

National Motor Freight: 194120, Washers / Gaskets / Pckg Dvcs Noi

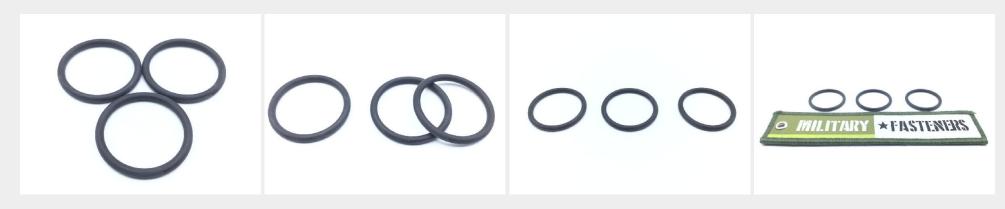

^{*} See page 2 for technical characteristics

P/N MS29513-119 Specifications

Outside Diameter:	1.114 Inches Minimum And 1.146 Inches Maximum
Cross-sectional Height:	0.100 Inches Minimum And 0.106 Inches Maximum
Center Hole Diameter:	0.918 Inches Minimum And 0.930 Inches Maximum
Material:	Rubber Butadiene-acrylonitrile Class Nbr

How to Order

Order this o-ring from our inventory online by visiting https://military-fasteners.com/o_rings/o_rings/MS29513-119 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out https://military-fasteners.com/o_rings/MS29513-119 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out https://military-fasteners.com/o_rings/MS29513-119 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out https://military-fasteners.com/o_rings/MS29513-119 and selecting the quantity you want then click "add to cart".