

**Description**


Inner diameter: 1.049", thickness 0.103", preformed packing, hydrocarbon fuel resistant, MS29513 series o-ring

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS29513121
Minimum Qty (MOQ):	25
NSN:	5331-00-337-8593
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

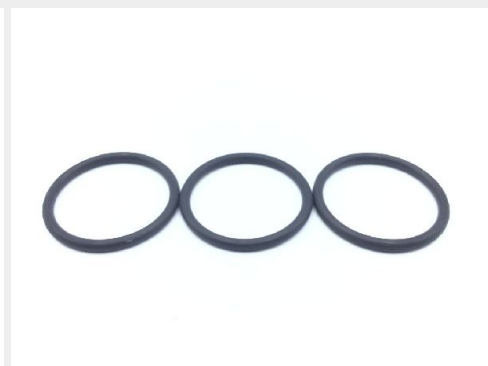

## P/N MS29513-121 Specifications

<b>Outside Diameter:</b>	1.239 Inches Minimum And 1.271 Inches Maximum
<b>Cross-sectional Height:</b>	0.100 Inches Minimum And 0.106 Inches Maximum
<b>Center Hole Diameter:</b>	1.043 Inches Minimum And 1.055 Inches Maximum
<b>Material:</b>	Rubber Butadiene-acrylonitrile Class Nbr

## How to Order

Order this o-ring from our inventory online by visiting [https://military-fasteners.com/o\\_rings/o\\_rings/MS29513-121](https://military-fasteners.com/o_rings/o_rings/MS29513-121) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.