

Description


inner diameter: 2.984", thickness 0.139", preformed packing o-ring, hydrocarbon fuel resistant

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS29513234
Minimum Qty (MOQ):	25
NSN:	5331-00-251-9367
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

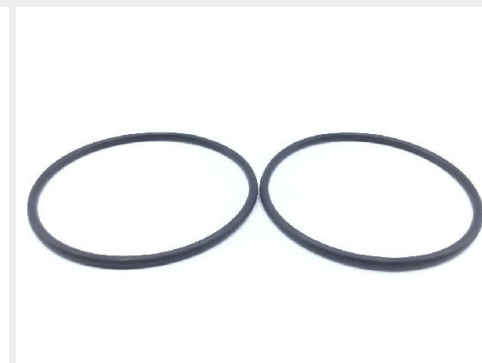

* See page 2 for technical characteristics

P/N MS29513-234 Specifications

Outside Diameter:	3.230 Inches Minimum And 3.294 Inches Maximum
Cross-sectional Height:	0.135 Inches Minimum And 0.143 Inches Maximum
Center Hole Diameter:	2.969 Inches Minimum And 2.999 Inches Maximum
Material:	Rubber Butadiene-acrylonitrile Class Nbr

How to Order

Order this o-ring from our inventory online by visiting https://military-fasteners.com/o_rings/o_rings/MS29513-234 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.