

**Description**


inner diameter: 3.109", thickness 0.139", preformed packing o-ring, hydrocarbon fuel resistant

\* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

**Additional Information**

SKU / Model:	MS29513235
Minimum Qty (MOQ):	25
NSN:	5331-00-251-9369
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

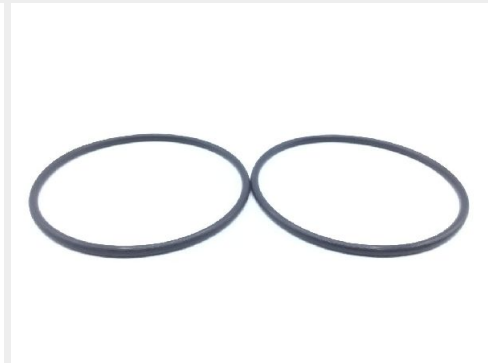

## P/N MS29513-235 Specifications

<b>Outside Diameter:</b>	3.355 Inches Minimum And 3.419 Inches Maximum
<b>Cross-sectional Height:</b>	0.135 Inches Minimum And 0.143 Inches Maximum
<b>Center Hole Diameter:</b>	3.094 Inches Minimum And 3.124 Inches Maximum
<b>Elongation Percentage:</b>	276 Maximum
<b>Material:</b>	Rubber Butadiene-acrylonitrile Class Nbr

## How to Order

Order this o-ring from our inventory online by visiting [https://military-fasteners.com/o\\_rings/o\\_rings/MS29513-235](https://military-fasteners.com/o_rings/o_rings/MS29513-235) and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.