

Description


inner diameter: 3.359", thickness 0.139", preformed packing, hydrocarbon fuel resistant, MS29513 series o-ring

* Manufacturer certifications are shipped with your order FREE of charge

Order this part online

Additional Information

SKU / Model:	MS29513237
Minimum Qty (MOQ):	20
NSN:	5331-00-291-3078
Schedule B:	4016.99.6050
ECCN:	EAR99
National Motor Freight:	194120, Washers / Gaskets / Pckg Dvcs Noi

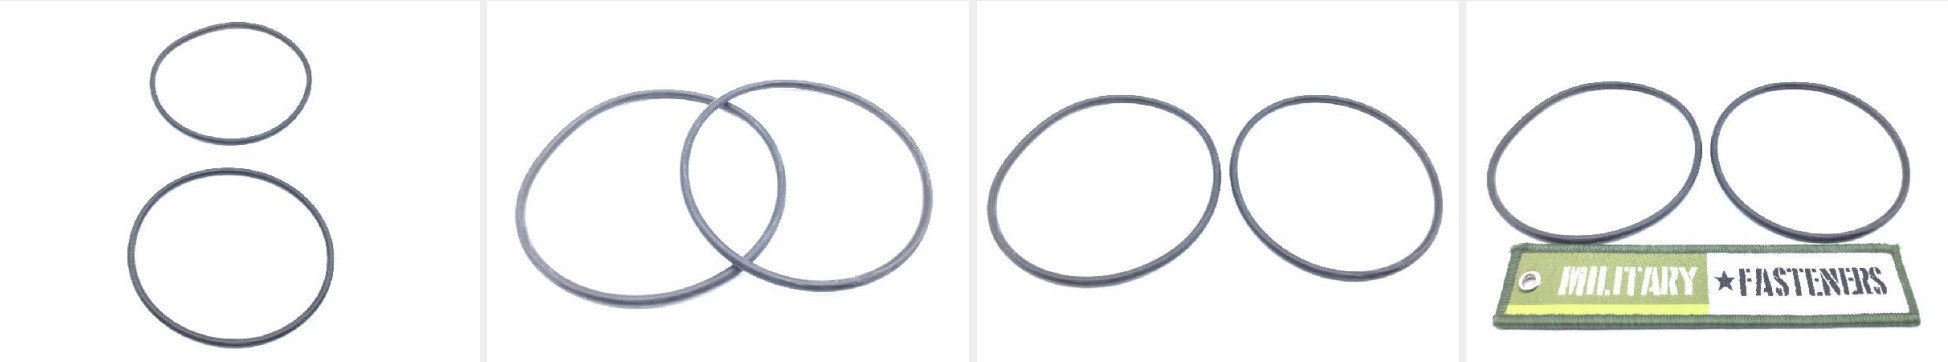

* See page 2 for technical characteristics

P/N MS29513-237 Specifications

Outside Diameter:	3.637 Inches Nominal
Cross-sectional Height:	0.135 Inches Minimum And 0.143 Inches Maximum
Center Hole Diameter:	3.344 Inches Minimum And 3.374 Inches Maximum
Elongation Percentage:	200 Maximum
Hardness Rating:	65.0 Shore Durometer A Nominal
Material:	Rubber Butadiene-acrylonitrile Class Nbr

How to Order

Order this o-ring from our inventory online by visiting https://military-fasteners.com/o_rings/o_rings/MS29513-237 and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.