


Description

Fastener Length: 1/4", Thread: 6-32, Thread Length: 1/4

* Manufacturer certifications are shipped with your order FREE of charge[Order this part online](#)**Additional Information**

SKU / Model:	MS321321L
Minimum Qty (MOQ):	10
NSN:	5305-01-201-9026
Schedule B:	7318.15.6080
ECCN:	EAR99
National Motor Freight:	093486, Bolts,nuts Or Screws, Noi (sub 3)

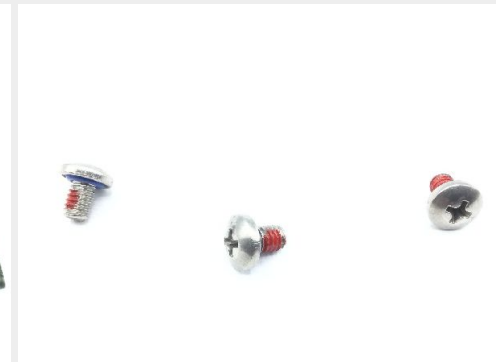

* See page 2 for technical characteristics

P/N MS3213-21L Specifications

Thread Class:	2a
Thread Direction:	Right-hand
Thread Length:	0.168 Inches Minimum And 0.250 Inches Maximum
Fastener Length:	0.230 Inches Minimum And 0.250 Inches Maximum
Head Style:	Watertight
Head Diameter:	0.256 Inches Minimum And 0.294 Inches Maximum
Head Height:	0.087 Inches Minimum And 0.097 Inches Maximum
Locking Feature:	Strip Threads Or Patch Threads Or Pellet Threads
Internal Drive Style:	Cross Recess Type 1
Nominal Thread Diameter:	0.138 Inches
Thread Quantity Per Inch:	32
Special Features:	Furnished With One O-ring
Material:	Steel Comp 304 Overall Or Steel Comp 305 Overall Or Steel Comp 316 Overall Or Steel Comp 384 Overall Or Steel Comp Xm-7 Overall
Material Document And Classification:	Qq-s-763 Fed Spec 1st Material Response Overall Or Qq-s-763 Fed Spec 2nd Material Response Overall Or Qq-s-763 Fed Spec 3rd Material Response Overall Or Astm A493 Assn Std 1st Material Response Overall Or Astm A493 Assn Std 2nd Material Response Overall Or Astm A493 Assn Std 3rd Material Response Overall Or Astm A493 Assn Std 4th Material Response Overall Or Astm A493 Assn Std 5th Material Response Overall
Surface Treatment:	Passivate Overall
Surface Treatment Document And Classification:	Qq-p-35 Fed Spec Single Treatment Response Overall
Thread Series Designator:	Unc

How to Order

Order this machine screw from our inventory online by visiting <https://military-fasteners.com/screws/machine+screws/MS3213-21L> and selecting the quantity you want then click "add to cart". Once items are in your cart you can check out [here](#) to complete your order.